




7800 Highway 20 West  
Huntsville, Alabama 35806  
Phone (256) 837-4411  
Fax (256) 721-0144  
[www.wyle.com](http://www.wyle.com)


Job No. T58722.01  
Certification Test Plan No. T58722.01, R  
September 30, 2011

## CERTIFICATION TEST PLAN


Prepared for:

<b>Manufacturer Name</b>	ES&S
<b>Manufacturer System</b>	Unity 3.4.0.0 System
<b>EAC Application No.</b>	<b>ESS1103</b>
<b>Manufacturer Address</b>	11208 John Galt Boulevard Omaha, NE 68137

  
Michael L. Walker, Test Plan Preparer

  
Frank Padilla, Voting Systems Manager

  
for Robert D. Hardy, Department Manager

  
for Raul Terceno, Q.A. Manager



NVLAP LAB CODE 100771-0

COPYRIGHT BY WYLE. THE RIGHT TO REPRODUCE, COPY, EXHIBIT, OR OTHERWISE UTILIZE ANY OF THE MATERIAL CONTAINED HEREIN WITHOUT THE EXPRESS PRIOR PERMISSION OF WYLE IS PROHIBITED. THE ACCEPTANCE OF A PURCHASE ORDER IN CONNECTION WITH THE MATERIAL CONTAINED HEREIN SHALL BE EQUIVALENT TO EXPRESS PRIOR PERMISSION. WYLE SHALL HAVE NO LIABILITY FOR DAMAGES OF ANY KIND TO PERSON OR PROPERTY, INCLUDING SPECIAL CONSEQUENTIAL DAMAGES, RESULTING FROM WYLE'S PROVIDING THE SERVICES COVERED BY THIS REPORT.



EAC Lab Code 0704

REVISION A



REPORT NO. Test Plan T58722.01-01, Rev. A

DATE September 30, 2011

REV	DATE	PAGE OR PARAGRAPH AFFECTED	DESCRIPTION OF CHANGES
---	8-30-11	Entire Document	Original Release
A	9-30-11	Section 1.0	Reworded section to provide clarification on testing purpose and the modification made to the system.
A	9-30-11	Section 1.1	Expanded scope of testing and provided clarification of testing and background information.
A	9-30-11	Section 1.4	Reworded section to provide additional information concerning testing.
A	9-30-11	Section 1.5.2	Updated photographs.
A	9-30-11	Section 1.5.5	Updated Table 1-4
A	9-30-11	Section 2.2	Updated section to clarify testing.
A	9-30-11	Section 3.1	Added test campaign reference.
A	9-30-11	Section 3.2	Updated COTS description and equipment description.
A	9-30-11	Section 4.1	Updated section to clarify testing.
A	9-30-11	Sections 4.4 and 4.5	Reworded sections to provide additional details.
A	9-30-11	Section 4.6	Changed "MD5" to "SHA1".
A	9-30-11	Section 5.1	Removed sentence dealing with hardware testing.
A	9-30-11	Section 6.3.2	Updated source code review description.
A	9-30-11	Section 7.1	Removed Table.

## TABLE OF CONTENTS

<b>1.</b>	<b>INTRODUCTION.....</b>	<b>1</b>
1.1	Scope.....	1
1.2	References.....	1
1.3	Terms and Abbreviations.....	2
1.4	Testing Responsibilities.....	4
1.4.1	Project Schedule.....	4
1.4.2	Owner Assignments.....	4
1.4.3	Test Case Development.....	4
1.4.4	Test Procedures and Validation.....	4
1.4.5	Third-Party Tests.....	4
1.4.6	EAC and Manufacturer Dependencies.....	5
1.4.7	VVSG.....	5
1.4.8	Beyond VVSG.....	5
1.5	Target of Evaluation Description.....	5
1.5.1	System Overview.....	5
1.5.2	System Hardware.....	6
1.5.3	System Software.....	14
1.5.4	System Operational Concept.....	16
1.5.5	System Limits.....	17
1.5.6	Supported Languages.....	18
1.5.7	Supported Functionality.....	19
<b>2.0</b>	<b>PRE-CERTIFICATION TESTING AND ISSUES.....</b>	<b>19</b>
2.1	Evaluation of Prior VSTL Testing.....	19
2.2	Known Field Issues.....	20
<b>3.0</b>	<b>MATERIALS REQUIRED FOR TESTING.....</b>	<b>20</b>
3.1	Software.....	20
3.2	Equipment.....	21
3.3	Test Support Materials.....	23
3.4	Deliverable Materials.....	23
<b>4.0</b>	<b>TEST SPECIFICATIONS.....</b>	<b>25</b>
4.1	Requirements (Strategy of Evaluations).....	26
4.2	Hardware Configuration and Design.....	27
4.3	Software System Functions.....	27
4.4	Security Functions.....	27
4.5	TDP Evaluation.....	28
4.6	Source Code Review.....	31
4.7	QA and CM System Review.....	33
<b>5.0</b>	<b>TEST DATA.....</b>	<b>33</b>
5.1	Test Data Recording.....	33
5.2	Test Data Criteria.....	33
5.3	Test Data Reduction.....	33

**TABLE OF CONTENTS (CONTINUED)**

<b>6.0</b>	<b>TEST PROCEDURE AND CONDITIONS .....</b>	<b>33</b>
6.1	Facility Requirements .....	33
6.2	Test Set-Up .....	34
6.3	Test Sequence .....	35
6.3.1	Hardware Test Description .....	35
6.3.2	Software Test Description.....	35
6.3.3	System Testing .....	36
<b>7.0</b>	<b>TEST OPERATIONS PROCEDURES.....</b>	<b>37</b>
7.1	Proprietary Data .....	37

**APPENDICES**

APPENDIX A	ES&S PROJECT SCHEDULE .....	A-1
APPENDIX B	THIRD PARTY BUILD SOFTWARE TABLE.....	B-1

## **1.0 INTRODUCTION**

The purpose of this National Certification Test Plan (Test Plan) is to document the strategy Wyle Laboratories, Inc., will follow during certification testing of the Election Systems and Software (ES&S) Unity 3.4.0.0 System. ES&S submitted the Unity 3.4.0.0 system to Wyle Laboratories, Inc., for certification to the 2002 VSS. Per section 4.4.2.3 of the EAC Testing and Certification Program Manual, all testing on the modifications to the system will be tested to the 2005 VVSG; however, pending successful completion of this test campaign, the system will only be granted a 2002 VSS certification since the system, as a whole, will not be tested to the 2005 VVSG.

The purpose of the modification is to add a Landline Modeming Solution to the DS200. This function enables jurisdictions to modem results from a precinct to a central location. In addition to modeming, the HPM and ERM applications were modified to support the addition of modem functionality.

### **1.1 Scope**

The focus of this test campaign is the addition of the DS200 Landline Modeming Solution and the interfacing EMS components. This test campaign is built on the previous test campaign supporting the original certification of the ES&S Unity 3.2.1.0 system and is coordinated with the new test campaign for the ES&S Unity 3.2.1.0 Rev 1 system, which will be conducted in parallel with this test campaign. More discussion of how these test campaigns will be coordinated is provided later in this test plan. The ES&S Unity 3.2.1.0 System was tested and certified to the 2002 Voting System Standards (VSS), EAC certification number: ESSUnity3210. During that test campaign the DS200 was tested to the VVSG2005 because it was a modification to the original EAC certified Unity 3.2.0.0, system EAC certification number: ESSUNITY3200. Details regarding testing for this campaign, including test setup and sequence are provided in Section 6.0.

In addition to the testing outlined in this test plan, the EAC instructed Wyle to perform testing on the DS200 for all functional requirements set forth in the EAC 2005 VVSG. This request stems from issues discovered in fielded EAC certified DS200s units using both Unity 3.2.1.0 and Unity 3.2.0.0. DS200 functional testing will be performed as part of the ES&S Unity 3.2.1.0 Rev 1 test campaign. Please refer to the Wyle test plan associated with ES&S' application number ESS1104 for the details of this testing. Upon completion of the ES&S Unity 3.2.1.0 Rev 1 test campaign, the results of the testing shall be evaluated and an analysis of impact on related systems shall be performed by Wyle prior to completion of the final Test Report and recommendation for ES&S Unity 3.4.0.0.

### **1.2 References**

The documents listed below were used in the development of the Test Plan and are utilized to perform certification testing.

- Election Assistance Commission 2005 Voluntary Voting System Guidelines, Volume I, Version 1.0, "Voting System Performance Guidelines", and Volume II, Version 1.0, "National Certification Testing Guidelines", dated December 2005
- United States Federal Election Commission Voting System Standards Volume I, "Performance Standards" and Volume II, "Test Standards" dated April 2002
- Election Assistance Commission Testing and Certification Program Manual, Version 1.0, effective date January 1, 2007
- Election Assistance Commission Voting System Test Laboratory Program Manual, Version 1.0, effective date July 2008
- National Voluntary Laboratory Accreditation Program NIST Handbook 150, 2006 Edition, "NVLAP Procedures and General Requirements (NIST Handbook 150)", dated February 2006

## 1.0 INTRODUCTION (CONTINUED)

### 1.2 References (continued)

- National Voluntary Laboratory Accreditation Program NIST Handbook 150-22, 2008 Edition, “Voting System Testing (NIST Handbook 150-22)”, dated May 2008
- United States 107<sup>th</sup> Congress Help America Vote Act (HAVA) of 2002 (Public Law 107-252), dated October 2002
- Wyle Laboratories’ Test Guidelines Documents: EMI-001A, “Wyle Laboratories’ Test Guidelines for Performing Electromagnetic Interference (EMI) Testing”, and EMI-002A, “Test Procedure for Testing and Documentation of Radiated and Conducted Emissions Performed on Commercial Products”
- Wyle Laboratories’ Quality Assurance Program Manual, Revision 4
- ANSI/NCSL Z540-1, “Calibration Laboratories and Measuring and Test Equipment, General Requirements”
- ISO 10012-1, “Quality Assurance Requirements for Measuring Equipment”
- EAC Requests for Interpretation (listed on [www.eac.gov](http://www.eac.gov))
- EAC Notices of Clarification (listed on [www.eac.gov](http://www.eac.gov))
- EAC Quality Monitoring Program residing on:  
[http://www.eac.gov/testing\\_and\\_certification/quality\\_monitoring\\_program.aspx](http://www.eac.gov/testing_and_certification/quality_monitoring_program.aspx)

A listing of the Unity 3.4.0.0 System Technical Data Package (TDP) documents submitted for this certification test effort is listed in Section 3.4: Deliverable Materials.

### 1.3 Terms and Abbreviations

This subsection defines all terms and abbreviations applicable to the development of this Test Plan.

**Table 1-1 Terms and Abbreviations**

Term	Abbreviation	Definition
Americans with Disabilities Act of 1990	ADA	ADA is a wide-ranging civil rights law that prohibits, under certain circumstances, discrimination based on disability.
AutoMARK Management Information System	AIMS	A windows-based election management system software application to define election parameters for the VAT, including functionality to import election definition files produced by the Unity EMS and create VAT flash memory cards
Audit Manager	AM	System software that provides security and user tracking for Election Data Manager (EDM) and ES&S Image Manager (ESSIM).
Configuration Management	CM	---
Commercial Off the Shelf	COTS	---
United States Election Assistance Commission	EAC	Commission created per the Help America Vote Act of 2002, assigned the responsibility for setting voting system standards and providing for the voluntary testing and certification of voting systems.
Election Data Manager	EDM	Unity EMS reporting component.

**1.0 INTRODUCTION (CONTINUED)**

**1.3 Terms and Abbreviations**

**Table 1-1 Terms and Abbreviations (continued)**

Term	Abbreviation	Definition
Election Management System	EMS	Within the Unity 3.4.0.0 System, the EMS is comprised of seven components: AIMS, AM, EDM, HPM, ESSIM, ERM, Log Monitor, and VAT Previewer
Election Reporting Manager	ERM	Unity EMS reporting component.
Election Systems and Software	ES&S	---
ESSIM	ESS Image Manager	A desktop publishing tool that allows users to design and print ES&S paper ballots.
Equipment Under Test	EUT	---
Functional Configuration Audit	FCA	Verification of system functions and combination of functions cited in the manufacturer's documentation.
Help America Vote Act	HAVA	Act created by United States Congress in 2002.
Hardware Programming Manager	HPM	An election package primarily used for converting election files and creating and loading election parameters.
National Institute of Standards and Technology	NIST	Government organization created to promote U.S. innovation and industrial competitiveness by advancing measurement science, standards, and technology in ways that enhances economic security and improves our quality of life.
Physical Configuration Audit	PCA	Review by accredited test laboratory to compare voting system components submitted for certification testing to the manufacturer's technical documentation, and confirmation the documentation meets national certification requirements. A witnessed build of the executable system is performed to ensure the certified release is built from tested components.
Quality Assurance	QA	--
Secure File Transfer Protocol	SFTP	A network protocol designed to provide secure file transfer and manipulation facilities over SSH.
Technical Data Package	TDP	Manufacturer documentation related to the voting system required to be submitted as a precondition of certification testing.
Test Case Procedure Specifications	TCPS	Wyle-developed document that specifies test items, input specifications, output specifications, environmental needs, special procedural requirements, inter-case dependencies, and all validated test cases that will be executed during the area under test.
Voter Assist Terminal	VAT	The electronic ballot marking device component is the ES&S AutoMARK
Voluntary Voting System Guidelines	EAC 2005 VVSG	Published by the EAC, the third iteration of national level voting system standards.
Wyle Laboratories, Inc.	Wyle	---
Wyle Operating Procedure	WoP	Wyle Test Method or Test Procedure.

## **1.0 INTRODUCTION (CONTINUED)**

### **1.4 Testing Responsibilities**

Prior to the development of this test plan, Wyle evaluated test results from previous test campaigns performed by EAC accredited VSTL's as well as test cases and results of developmental testing conducted by ES&S during the pre-certification process that were provided by ES&S in their TDP. The purpose of this evaluation was to determine the scope of testing required for system certification. Following the review, Wyle determined that testing from previous test campaigns could be utilized to satisfy the requirements of this test campaign. All other core and non-core software and hardware certification testing will be conducted under the guidance of Wyle by personnel verified by Wyle to be qualified to perform the testing.

Additionally, Wyle elected to witness testing conducted by ES&S at the ES&S facility located in Omaha, NE. Testing commenced on August 15, 2011 and consisted of the following test configurations: sixteen DS200 units being voted and all results being transmitted to ERM using a wired modem via an SFTP, ten DS200 units directly wired into the phone lines, and six DS200 units wired into a phone simulator. The primary focus of the testing was the transmission of data via the modem connection from the DS200 to ERM. Prior to the start of the witness of testing on-site at the ES&S facility, a PCA was performed by ES&S and verified by Wyle to determine and verify all equipment and support materials used during testing. This information was verified and all witness data is documented in an engineering logbook by an authorized Wyle employee.

Review of test cases and results of developmental testing conducted by ES&S during the pre-certification process also allowed for assessment of ES&S' efforts to develop and test the system and to correct any known defects.

#### **1.4.1 Project Schedule**

This information is contained in a Wyle-generated Microsoft Project schedule, to be provided under separate cover. The dates on the schedule are not firm dates but planned estimates presented for informational purposes.

#### **1.4.2 Owner Assignments**

This information is contained in the Wyle generated Microsoft Project schedule.

#### **1.4.3 Test Case Development**

Wyle will utilize the "Wyle Baseline Test Cases" for the Functional Configuration Audit (FCA). These will be augmented with specially designed test cases tailored to the ES&S Unity 3.4.0.0 System. Wyle has designed specific election definition and test cases for the Operational Status Check and the Logic and Accuracy Tests. The "Baseline" functional test cases and the election definitions have been previously submitted to the EAC for review.

#### **1.4.4 Test Procedure Development and Validation**

Wyle will utilize the Wyle Operating Procedures (WoPs) during the duration of this test program. The validated WoPs have been previously submitted to the EAC for review.

#### **1.4.5 Third-Party Tests**

Wyle will not utilize any 3rd party testing during performance of the ES&S Unity 3.4.0.0 system test campaign.



## **1.0 INTRODUCTION (CONTINUED)**

### **1.4 Testing Responsibilities (continued)**

#### **1.4.6 EAC and Manufacturer Dependencies**

This information is contained in the Wyle-generated Microsoft Project schedule.

#### **1.4.7 VVSG**

The Unity 3.4.0.0 System testing will consist of only modifications and inclusion of the Landline Modeming in which both areas will be tested to all applicable EAC 2005 VVSG requirements.

#### **1.4.8 Beyond VVSG**

Wyle witnessed a machine volume test and a suite of negative tests on-site at ES&S. There were no issues found during the execution of the test cases during this period. The test cases which were performed by ES&S and witnessed by Wyle will be provided as required for reference.

### **1.5 Target of Evaluation Description**

The following sections address the design methodology and product description of the Unity 3.4.0.0 System, as taken from the ES&S technical documentation.

#### **1.5.1 System Overview**

The ES&S Unity 3.4.0.0 Election System is a comprehensive suite of vote tabulation equipment and software solutions providing end-to-end election management. The Unity 3.4.0.0 voting system includes the following core system components detailed in Table 1-1.

**Table 1-2 Unity 3.4.0.0 System Components**

<b>System Hardware</b>	<b>System Software</b>
Model 100 <ul style="list-style-type: none"><li>Hardware v. 1.3.0</li><li>Firmware v. 5.4.4.5</li></ul>	Audit Manager (AM) v. 7.5.2.0
DS200 <ul style="list-style-type: none"><li>Hardware v. 1.2.1</li><li>Firmware v. 1.6.0.0</li></ul>	Election Data Manager (EDM) v. 7.8.1.0
Model 650 <ul style="list-style-type: none"><li>Hardware v. 1.1 and 1.2</li><li>Firmware v. 2.2.2.0</li></ul>	ES&S Ballot Image Manager (ESSIM) v. 7.7.1.0
AutoMARK <ul style="list-style-type: none"><li>Hardware v. 1.0, 1.1, and 1.3.1</li></ul> Firmware v. 1.3.2907	Hardware Programming Manager (HPM) v.5.8.0.0
<b>System Hardware</b>	<b>System Software</b>
	Election Reporting Manager (ERM) v. 7.8.0.0
	Log Monitor v. 1.0.0.0
	AutoMARK Management Information System (AIMS) v. 1.3.257
	VAT Previewer v. 1.3.2907

## 1.0 INTRODUCTION (CONTINUED)

### 1.5 Target of Evaluation Description (continued)

#### 1.5.2 System Hardware

The ES&S Unity 3.4.0.0 System can be set up to support one or more of the following hardware components:

- Model 650 Central Tabulator
- Model 100 Precinct Tabulator
- DS200 Precinct Tabulator
- AutoMARK Voting Assist Terminal

#### Model 100

The Model 100 is a precinct-based, voter-activated paper ballot tabulator that uses a proprietary recognition engine to detect completed ballot targets. The Model 100 is designed to alert voters to overvoted races, undervoted races, and blank ballots. It accepts ballots inserted in any orientation. Once the ballot is scanned by the Model 100, it is passed to the integrated ballot box.



**Photograph 1: M100 (on plastic ballot box)**

1.0 INTRODUCTION (CONTINUED)


1.5 Target of Evaluation Description (continued)

1.5.2 System Hardware (continued)

**Precinct Ballot Tabulator: DS200**

The DS200 is an optical scan paper ballot tabulator designed for use at the polling place level. After the voter marks a paper ballot, their ballot is inserted into the unit and immediately tabulated. The tabulator uses a high-resolution image-scanning device to image the front and rear of the ballot simultaneously. The resulting ballot images are then decoded by a proprietary recognition engine.

The system includes a 12-inch touch screen display providing voter feedback and poll worker messaging. Once a ballot is tabulated and the system updates internal vote counters, the ballot is dropped into an integrated, secure ballot box. The DS200 includes an internal thermal printer for the printing of the printing of zero reports, log reports, and polling place totals upon the official closing of the polls.

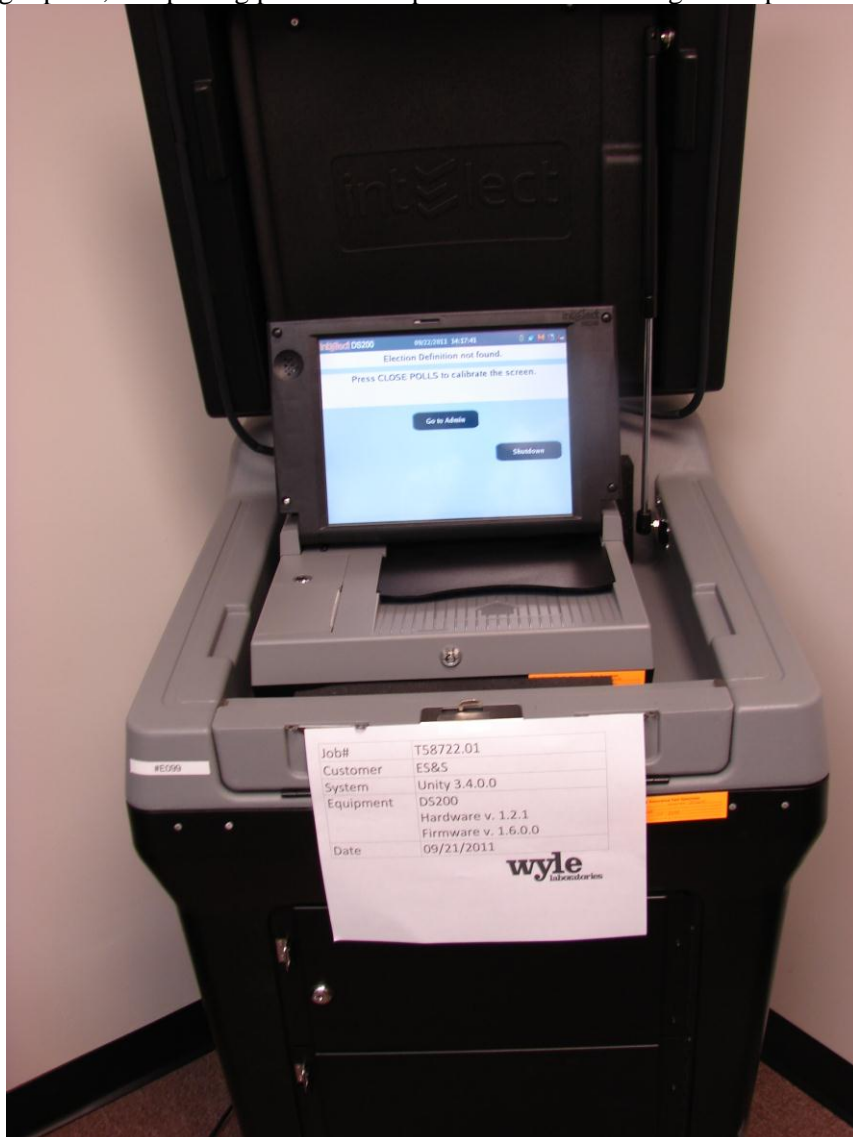

Photograph 2: DS200 (on plastic ballot box)

**1.0 INTRODUCTION (CONTINUED)**

**1.5 Target of Evaluation Description (continued)**

**1.5.2 System Hardware (continued)**



**Photograph 3: DS200 (on metal ballot box)**

1.0 INTRODUCTION (CONTINUED)

1.5 Target of Evaluation Description (continued)

1.5.2 System Hardware (continued)

**Tabulator: Model 650**

The Model 650 is a high-speed, optical scan central ballot counter. During scanning, the Model 650 prints a continuous audit log to a dedicated audit log printer and can print results directly from the scanner to a second connected report printer. The scanner saves results to a Zip disk that officials can use to generate results reports from a PC running Election Reporting Manager. The Model 650 sorts write-in ballots, blank ballots, overvoted ballots and illegal ballots.



**Photograph 5: M650**

**1.0 INTRODUCTION (CONTINUED)**


**1.5 Target of Evaluation Description (continued)**

**1.5.2 System Hardware (continued)**

**Electronic Ballot Marking Device: AutoMARK Voter Assist Terminal (VAT)**

The electronic ballot marking device component is the ES&S AutoMARK Voter Assist Terminal (VAT). The AutoMARK VAT assists voters with disabilities by marking optical scan ballots. The AutoMARK VAT includes two user interfaces, to accommodate voters who are visually or physically impaired or voters who are more comfortable reading or hearing instructions and choices in an alternative language. The AutoMARK is equipped with a touch screen, and keypad. The touch screen interface includes various colors and effects to prompt and guide the voter through the ballot marking process. Each key has both Braille and printed text labels designed to indicate function and a related shape to help the voter determine its use.

Regardless whether the voter uses the touch screen or other audio interface, changes can be made throughout the voting process by navigating back to the appropriate screen and selecting the change or altering selections at the mandatory vote summary screen that closes the ballot marking session.

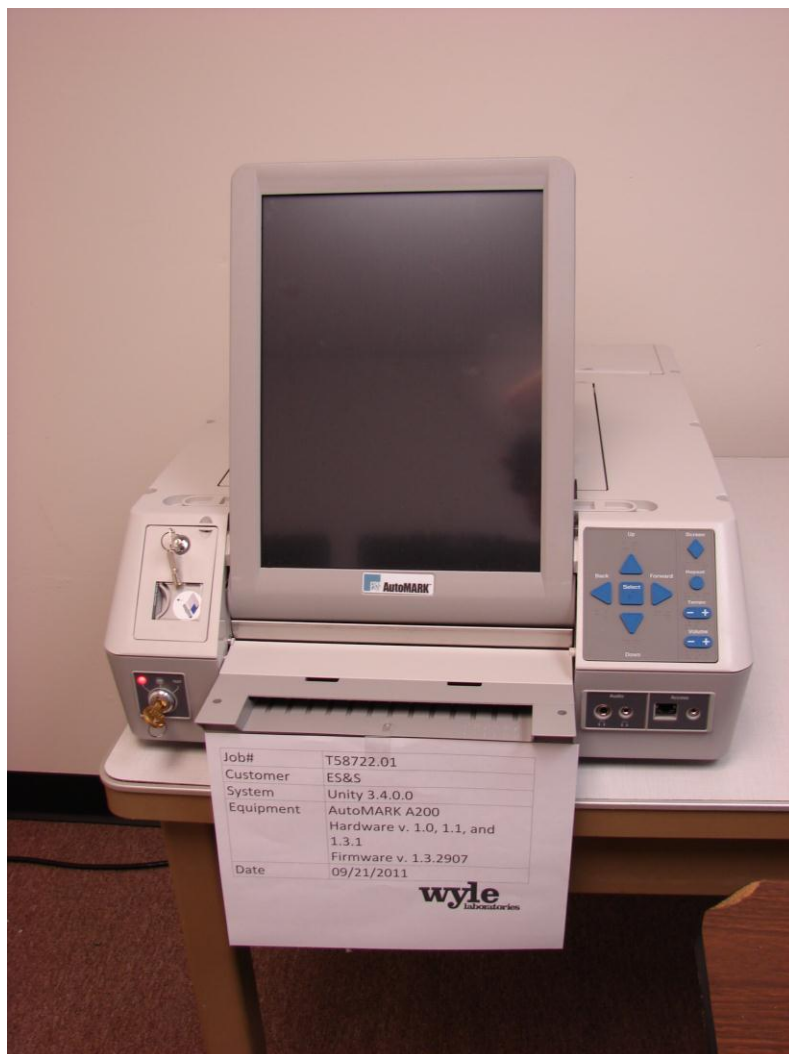


**Photograph 6: AutoMARK A200 VAT**



1.0 INTRODUCTION (CONTINUED)

1.5 Target of Evaluation Description (continued)

1.5.2 System Hardware (continued)

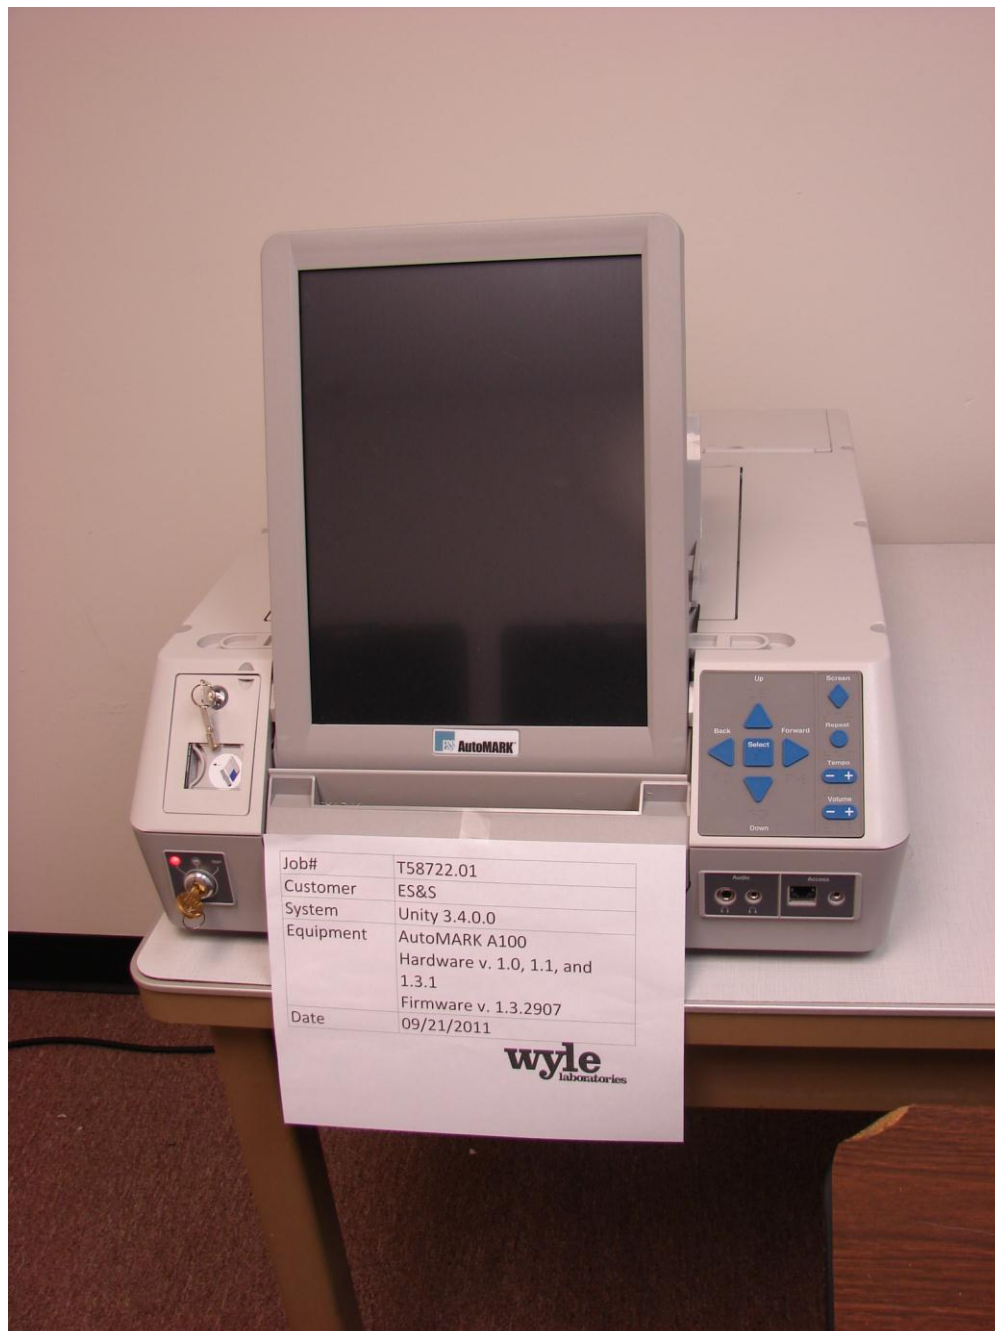

Photograph 7: AutoMARK A100 VAT

## 1.0 INTRODUCTION (CONTINUED)

## 1.5 Target of Evaluation Description (continued)

### 1.5.2 System Hardware (continued)

#### Cisco ASA 5505

The Cisco ASA 5505 Adaptive Security Appliance is a next-generation, full-featured security appliance. The Cisco ASA 5505 features a flexible 8-port 10/100 Fast Ethernet switch only two of which are active. The Cisco ASA 5505 as configured supports 2 VLANS i.e. a DMZ and an Inside LAN. The RAS and SFTP Server reside on the DMZ. The SFTP Client and EMS reside on the Inside LAN. The DMZ is required to isolate the Inside LAN from any connectivity with the outside e.g. the dial-up connections through the RAS. The Cisco ASA 5505 Adaptive Security Appliance is further configured to only allow SSH traffic i.e. traffic on port 22.




Photograph 8: Cisco Router



**1.5 INTRODUCTION (CONTINUED)**

**1.5 Target of Evaluation Description (continued)**

**1.5.2 System Hardware (continued)**

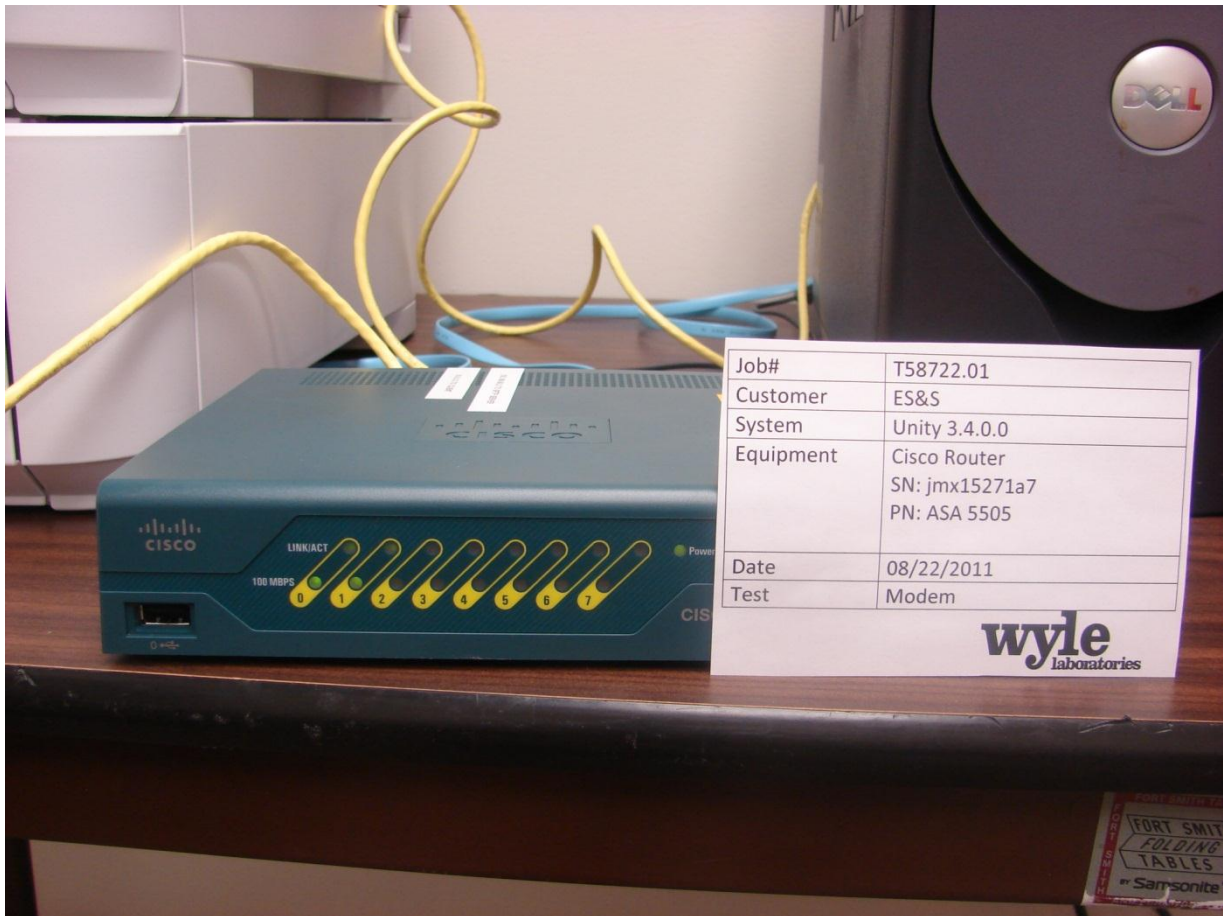

**Photograph 9: Cisco Router**

## 1.5 INTRODUCTION (CONTINUED)

### 1.5 Target of Evaluation Description (continued)

#### 1.5.2 System Hardware (continued)

##### Remote Access Service (RAS)

The RAS server, which is part of the Windows 2003 R2 operating system, allows incoming DS200 remote access dial-up connections to the SFTP server.



**Photograph 10: SFTP Server Configuration**

#### 1.5.3 System Software

The Unity 3.4.0.0 Election Management System is an application suite comprised of eight components: AutoMark Information Management System, Audit Manager, Election Data Manager, ES&S Ballot Image Manager, Hardware Programming Manager, Election Reporting Manager, Log Monitor, and VAT Previewer.

##### AIMS

AutoMARK Management Information System (AIMS) is a windows-based election management system software application used to define election parameters for the VAT, including functionality to import election definition files produced by the Unity EMS and create VAT flash memory cards.

## **1.0 INTRODUCTION (CONTINUED)**

### **1.5 Target of Evaluation Description (continued)**

#### **1.5.3 System Software (continued)**

##### **Audit Manager (AM)**

The Audit Manager (AM) utility provides security and user tracking for EDM and ESSIM. AM runs in the background of the other Unity programs and provides password security and a real-time audit log of all user inputs and system outputs. Election coders use Audit Manager to set Unity system passwords and track user activity.

##### **Election Data Manager (EDM)**

Election Data Manager (EDM) is the entry point for the Unity Election Management System. EDM is a single-entry database that stores precinct, office, and candidate information. Data entered for an initial election is stored to a re-useable database to be recalled and edited for all elections that follow. EDM is used in conjunction with other Unity software to format and print ballots, program ballot scanning equipment, and produce Election Day reports.

##### **ES&S Ballot Image Manager (ESSIM)**

ES&S Ballot Image Manager (ESSIM) uses ballot style information created by Unity EDM to display the ballots in a WYSIWIG design interface. Users can apply typographic formatting (font, size, attributes, etc.) to individual components of the ballot. Text and graphic frames can also be added to the ballot.

##### **Hardware Programming Manager (HPM)**

Hardware Programming Manager (HPM) uses the election specific database created with EDM and ESSIM to program the appropriate media for ES&S tabulation devices. HPM converts the ballot layout data into the format required for each ES&S system. HPM then writes this data to the appropriate required media required; for the DS200 this would be a USB flash drive or a Zip disk for Model 650 tabulators.

##### **Election Reporting Manager (ERM)**

Election Reporting Manager (ERM) generates paper and electronic reports for election workers, candidates, and the media. Jurisdictions can use a separate ERM installation to display updated election totals on a monitor as ballot data is tabulated, and send results reports directly to media outlets. ERM support accumulation and combination of ballot results data from all ES&S tabulators. Precinct and accumulated totals reports provide a means to accommodate candidate and media requests for totals and are available upon demand. High-speed printers are configured as part of the system accumulation/reporting stations - PC and related software.

##### **Log Monitor**

Log Monitor is a Windows Service that runs in the background of any active ES&S Election Management software application to monitor the proper functioning of the Windows Event Viewer. Log Monitor closes any active ES&S software application if the system detects the improper deactivation of the Windows Event Viewer.

## 1.0 INTRODUCTION (CONTINUED)

## 1.5 Target of Evaluation Description (continued)

### 1.5.4 System Operational Concept

The operational flow and low-level system interfaces for the ES&S Unity 3.4.0.0 voting system are illustrated in Figures 1-1 and 1-2.

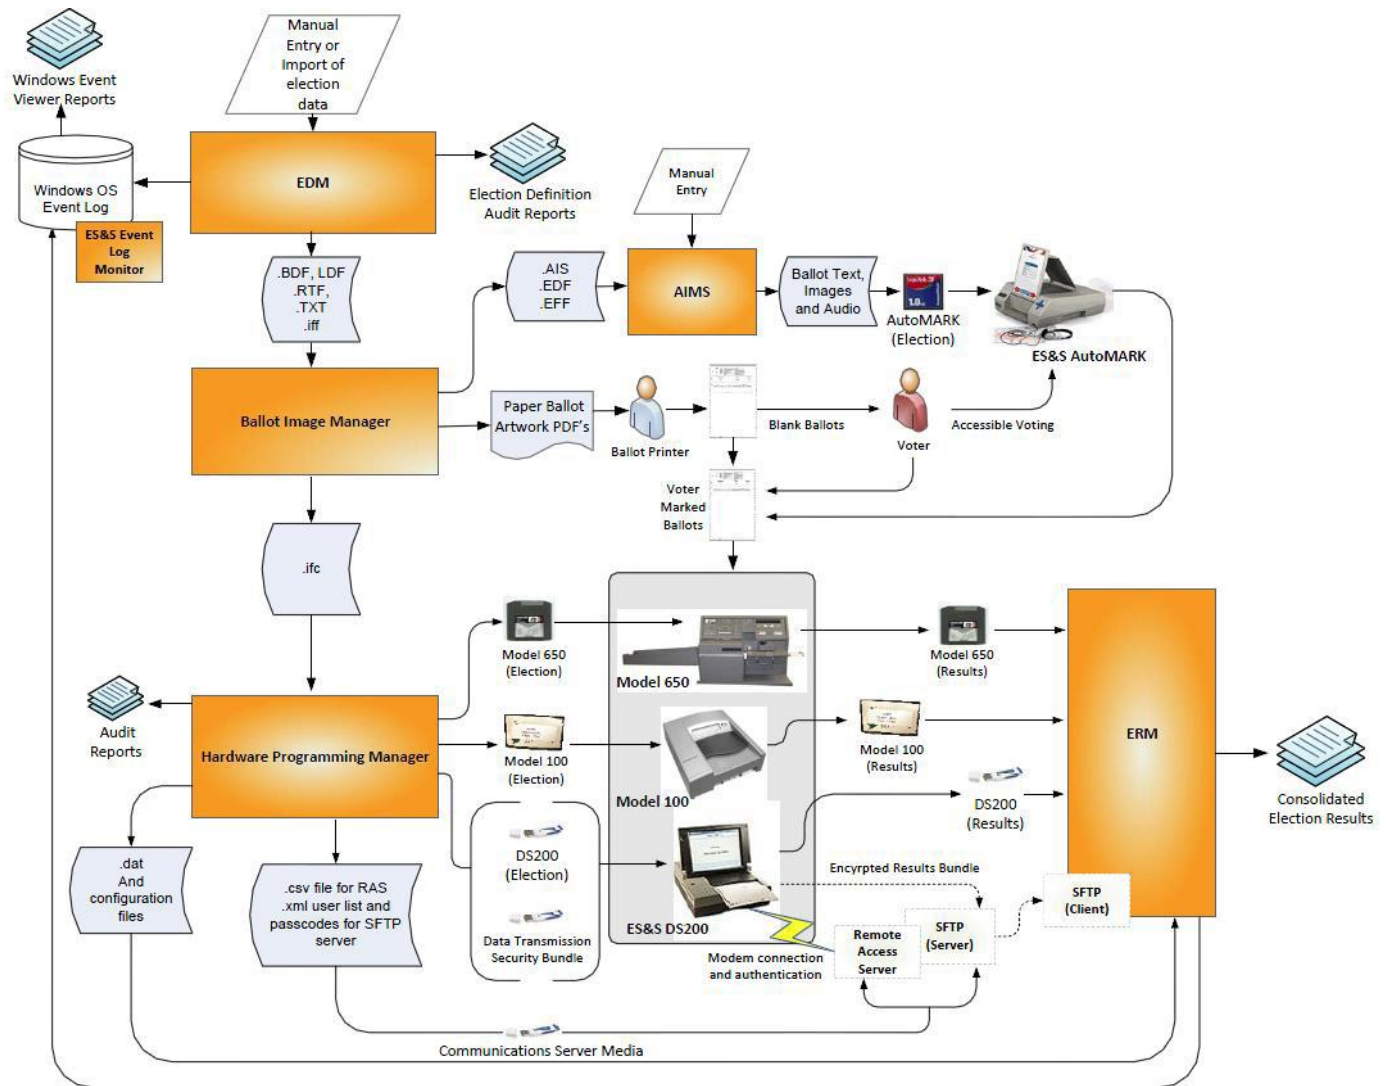


Figure 1-1 System Overview Diagram

## 1.0 INTRODUCTION (CONTINUED)

### 1.5 Target of Evaluation Description (continued)

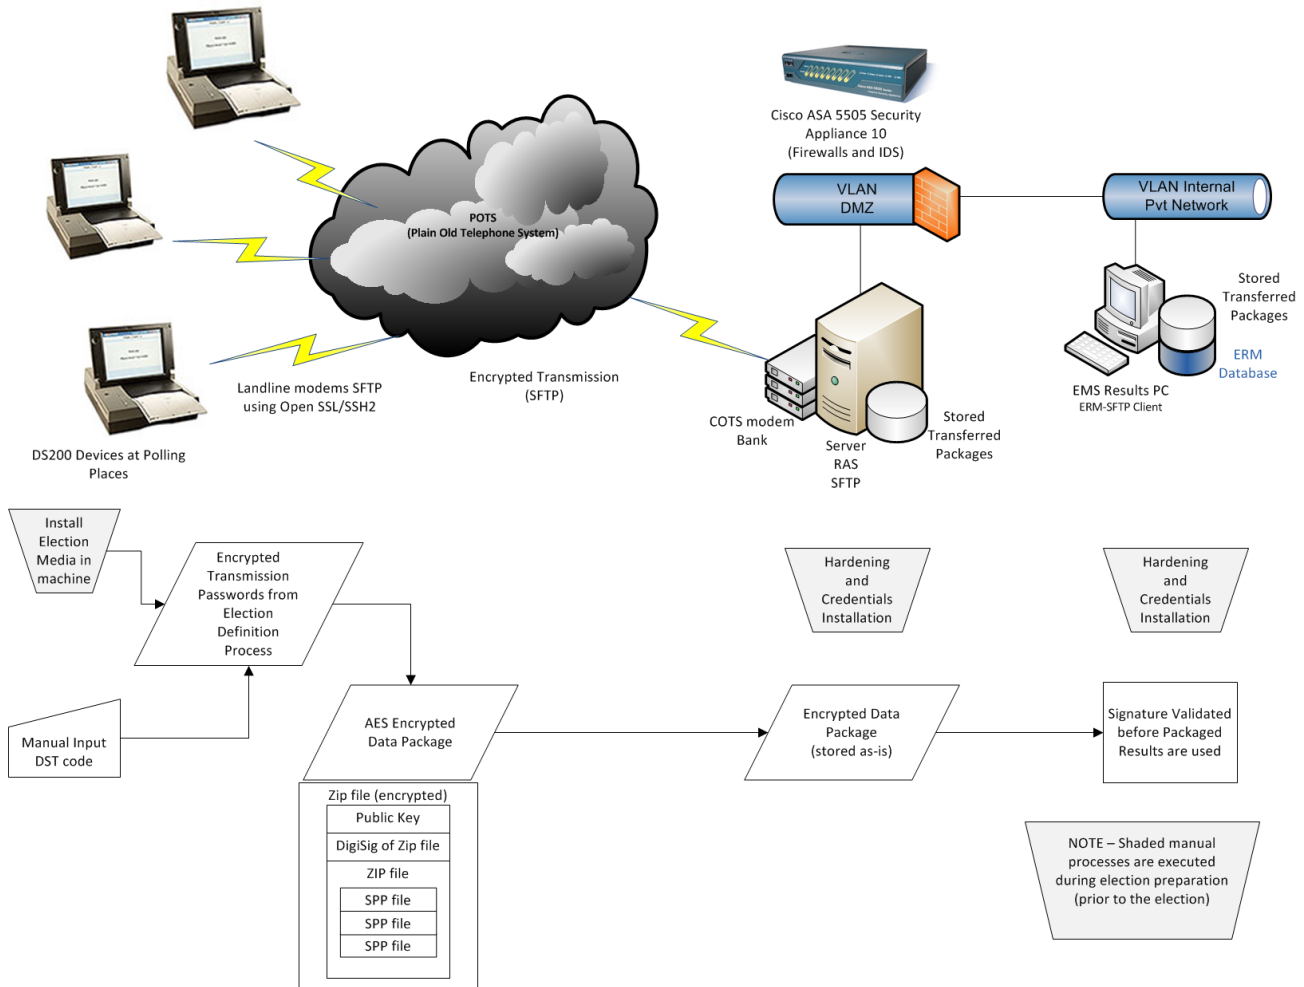


Figure 1-2 Secure File Transfer Configuration Guide

### 1.5.5 System Limits

The system limits and the ballot target limits that ES&S has stated to be supported by the Unity 3.4.0.0 System are compiled in the tables below.

Table 1-3 Unity 3.4.0.0 System Limits

Limit Description (Maximum)	Limit Value	Limiting Factor
Precincts allowed in an election	2900	HPM/ERM
Precinct allowed per polling place	2200	HPM
Precinct included per poll (reporting limit)	1900	ERM
Contests allowed per election	Dependent on election	---
Candidates/Counters allowed per election	21,000	ERM
Candidates/Counters allowed per precinct	1,000	ERM
Candidates per polling place	1,200	HPM

## 1.0 INTRODUCTION (CONTINUED)

### 1.5.5 System Limits (continued)

**Table 1-3 Unity 3.4.0.0 System Limits (continued)**

<b>Limit Description (Maximum)</b>	<b>Limit Value</b>	<b>Limiting Factor</b>
Ballot styles per election	5,000	HPM
Contests per ballot style	1,100	HPM
Precincts per ballot style	1,700	HPM
Candidates (choices) allowed per contest	175	HPM
Count for any precinct element	999,000	ERM report
Ballot styles allowed per precinct	5,000	HPM
Ballot styles allowed per election	1,639	HPM
Number of parties allowed	18	HPM
“Vote for” per contest	90	HPM

**Table 1-4 Unity 3.4.0.0 Ballot Target Limits**

<b>Ballot Size (ovals per inch)</b>	<b>Positions per Column x Row</b>
8 ½ x 11” (4 ovals per inch)	3 Columns x 36 rows = 108/side
8 ½ x 14” (3 ovals per inch)	3 Columns x 36 rows = 108/side
8 ½ x 14” (4 ovals per inch)	3 Columns x 48 rows = 144/side
8 ½ x 17” (3 ovals per inch)	3 Columns x 41 rows = 123/side
8 ½ x 17” (3 ovals per inch)	3 Columns x 45 rows = 135/side
8 ½ x 17” (4 ovals per inch)	3 Columns x 60 rows = 180/side
8 ½ x 19” (3 ovals per inch)	3 Columns x 51 rows = 153/side
8 ½ x 19” (4 ovals per inch)	3 Columns x 68 rows = 204/side

### 1.5.6 Supported Languages

The following languages have been stated by ES&S to be supported by the Unity 3.4.0.0 System:

- English
- Spanish



## **1.0 INTRODUCTION (CONTINUED)**

### **1.5 Target of Evaluation Description (continued)**

#### **1.5.7 Supported Functionality**

The Unity 3.4.0.0 is designed to support the following voting variations:

- General Election
- Closed Primary
- Open Primary
- Early Voting
- Partisan offices
- Non-Partisan offices
- Write-in voting
- Straight Ticket voting
- Split Precincts
- Ballot Rotation
- Vote for N of M
- Audio Ballot
- Recall Issues
- Cross-Party Endorsement

As stated in the DS200 System Functionality Description, the Unity 3.4.0.0 System does not include functions for the following:

- Rank Choice Voting
- Cumulative Voting
- Primary Presidential Delegation Nominations

Testing will not be conducted on these functions.

## **2.0 PRE-CERTIFICATION TESTING AND ISSUES**

### **2.1 Evaluation of Prior VSTL Testing**

Wyle received and evaluated previous test results for the Unity 3.2.1.0 (a predecessor to the Unity 3.4.0.0 System) from iBeta Quality Assurance. Wyle was provided a summary report from iBeta (iBeta report number (V)2010-17SEP-001(A)) detailing what was performed and the discrepancies discovered during testing. Wyle then tested the system as documented in Wyle Test Report No. T58200.01-01, Rev. B.

## **2.0 PRE-CERTIFICATION TESTING AND ISSUES (CONTINUED)**

### **2.2 Known Field Issues**

Two technical advisories have been issued by the EAC concerning known field issues. Each of these is summarized below:

EAC Technical Advisory ESS2011-02: During local acceptance testing in a jurisdiction, multiple DS200 Ballot Scanners exhibited an anomaly where the touch screen interface would stop responding to touches.

EAC Technical Advisory ESS2011-03: During local acceptance testing, a DS200 Ballot Scanner failed to count a marked ballot position resulting in a lost vote.

In response to the technical advisories, ES&S has published two Technical Bulletins (PRBDS2000013 and FYIDS2000021, both of which are dated 8/3/2011).

Additionally, as a result of the issues identified above, the prevalence of the DS200 component across the ES&S Unity line of products, and the fact that the DS200 was tested in part by three separate VSTLs, the EAC has instructed Wyle to perform full regression testing on the DS200 for all functional requirements set forth in the EAC 2005 VVSG. This testing will be performed as part of the ES&S Unity 3.2.1.0 Rev 1 testing campaign. The results of this test campaign must be evaluated and an analysis of impact on related systems be performed by Wyle prior to final approval.

## **3.0 MATERIALS REQUIRED FOR TESTING**

The materials required for certification testing of the Unity 3.4.0.0 System include software, hardware, test materials, and deliverable materials to enable the test campaign to occur will be delivered by ES&S to Wyle.

### **3.1 Software**

The tables below list the software the manufacturer must submit for testing. This section defines the two types of software needed for testing:

- software used for the testing of hardware, software, and security
- supporting software required for the test environment (operating systems, compilers, assemblers, database managers, and any other supporting software)

The Unity 3.4.0.0 System software and firmware submitted for review is identified in the table below. Wyle will only be reviewing and building the source code pertaining to the DS200 and the EMS. All other software components will be harvested from the previous Unity 3.2.1.0 and Unity 3.2.0.0 Rev 1 test campaigns. Wyle will be performing a comparison of the software utilized for this test campaign against the previously listed software. All software reviewed and built by Wyle will have a SHA1 hash made of the resulting software files or disc images.



### 3.0 MATERIALS REQUIRED FOR TESTING (CONTINUED)

#### 3.1 Software (continued)

**Table 3-1 Unity 3.4.0.0 System Software and Firmware (continued)**

The Unity 3.4.0.0 System includes the following COTS software which has been delivered by ES&S:

**Table 3-1 Unity 3.4.0.0 System Third Party Software Descriptions**

Software Product	Software version	Filename	Hash Value
Microsoft Windows XP, SP3	5.1	Original Disk	N/A
Microsoft Windows XP Updates	N/A	N/A	N/A
Micro Focus RM/COBOL Runtime	11.01	Original Disk	N/A
Microsoft Server 2003	R2	Original Disk	N/A
Microsoft Server 2003 Updates	N/A	N/A	N/A
Adobe Acrobat Standard	9.0	N/A	N/A
AVG Business Edition	9.0	N/A	N/A
Microsoft Excel	Office 2003	Original Disk	N/A
Windows CE	5.0.2.0	N/A	N/A
Cerberus FTP	4.0	N/A	N/A
Ipswitch WS_FTP Professional	12.3	N/A	N/A

**Table 3-2 Unity 3.4.0.0 Third Party Build Software Description**

*Located in Appendix B*

#### 3.2 Equipment

This subsection categorizes the equipment the manufacturer has submitted for testing. Each test element is included in the list of the equipment required for testing of that element, including system hardware, general purpose data processing and communications equipment, and any required test instrumentation.

Every effort is made to verify that the COTS equipment has not been modified for use. Wyle will perform research using the COTS equipment manufactures' website based on the serial and service tag numbers for each piece of equipment and will evaluate COTS hardware, system software and communications components for proven performance in commercial applications other than elections. For PCs, laptops, and servers, the service tag information is compared to the system information found on each machine. Physical external and internal examination is also performed to the best of Wyle's abilities when the equipment is easily accessible without the possibility of damage. Hard drives, RAM memory, and other components are examined to verify that the components match the information found on the COTS equipment manufacturers' websites.

**Table 3-3 Unity 3.4.0.0 Voting System Equipment Description**

Equipment	Description	Serial Numbers
Model 100 <ul style="list-style-type: none"><li>Hardware v. 1.3.0</li><li>Firmware v. 5.4.4.5</li></ul>	A precinct-based, voter-activated paper ballot tabulator that uses a proprietary recognition engine to detect completed ballot targets.	205071

### 3.0 MATERIALS REQUIRED FOR TESTING (CONTINUED)

#### 3.2 Equipment (continued)

**Table 3-3 Unity 3.4.0.0 Voting System Equipment Description (continued)**

Equipment	Description	Serial Numbers
DS200 <ul style="list-style-type: none"><li>Hardware v. 1.2.1</li><li>Firmware v. 1.6.0.0</li></ul>	An optical scan paper ballot tabulator designed for use at the polling place level.	ES0108340178, ES0107380927, ES0107360007
Model 650 <ul style="list-style-type: none"><li>Hardware v. 1.1 and 1.2</li><li>Firmware v. 2.2.2.0</li></ul>	A high-speed, optical scan central ballot counter. During scanning, the Model 650 prints a continuous audit log to a dedicated audit log printer and can print results directly from the scanner to a second connected printer.	2406 8013
AutoMARK A100	ADA Ballot Marking Device	AM0105490825
AutoMARK A200	ADA Ballot Marking Device	AM0208470644
Ballot Box	Plastic Ballot Box	E076, E089, E099
Ballot Box (Versions 1.0, 1.1 & 1.2)	Metal Box with Diverter	E015, E017
Server PC	Dell Optiplex GX260	7DOWL21
Server PC	Dell Precision T3500	15TPMN1
Client PC	Dell Optiplex 760	2HF3CK1
Router/Firewall	Cisco ASA 5505	JMX152741AT
Modem Board	Equinox 8-port	VW10648
Modem Board	Digi	V70957956
Modem Board	Perle	6602983-10
Ballot on Demand Printer	OKI C9650	AF85027113A0
Report Printer	HP LaserJet 4050N	USQX074394
Zip Disk	Used to store Model 650 results data	---
Headphones	Avid FV 60	HP-57936-1, HP-57936-2, HP-57936-3, HP-57936-4, HP-57936-5, HP-57936-6, HP-57936-7, HP-57936-8 and HP-57936-9

In order to perform the software witness and trusted builds, the following equipment was used:

**Table 3-4 Unity 3.4.0.0 Voting System Build Machine Description**

Description of Equipment	Serial Number	Operating System
Dell Optiplex 760	6DCKJG1	Windows XP SP3 or Vista
Dell Keyboard – Model L100	CN0RH659735716B402JS	N/A
Dell Mouse – Model XN966	HS847130DLE	N/A

### 3.0 MATERIALS REQUIRED FOR TESTING (CONTINUED)

#### 3.2 Equipment (continued)

**Table 3-4 Unity 3.4.0.0 Voting System Build Machine Description (continued)**

Description of Equipment	Serial Number	Operating System
ACER Monitor – Model AL1716 P/N: ET 1716B.012	ETL460C005609012DCPY11	N/A
Dell Precision T3500	15TNMN1	Windows 7
Dell Keyboard – Model L100	CN0RH65965890660029T	N/A
Dell Mouse – Model DHY933	F0N002Y1	N/A
LG Monitor – Model L1942TT	904NDNU09543	N/A

#### 3.3 Test Support Materials

The scope of testing determines the quantity of a specific material required. The following test materials are required to support the Unity 3.4.0.0 System certification testing.

**Table 3-5 Unity 3.4.0.0 System Test Support Materials**

Test Material	Quantity	Make	Model
Paper Rolls	25	DS200	N/A
COTS Printer	1	EPSON LQ-590	FSQY140868
Security Seals	5000	Intab	800-0038R
Security Locks	20	E. J. Brooks	86022
	25	E. J. Brooks	6024
	50	American Casting Corp.	00561-03
	50	A. Rifkin	RIFSI
ES&S Pens	10	BIC	Grip Roller
Security Sleeves	7	ES&S	PS-S7-936-XX(1-7)
CF Card Reader	1	SanDisk	018-6305
Magnifier	3	---	---
Headphone Covers	30	---	---
Paddles (yes/no)	3	---	---

#### 3.4 Deliverable Materials

The materials listed below are to be delivered as part of the Unity 3.4.0.0 System to the users.

**Table 3-6 Deliverable Materials**

Material	Version	Description
AM	7.5.2.0	EMS
Election Data Manager (EDM)	7.8.1.0	EMS
ES&S Ballot Image Manager (ESSIM)	7.7.1.0	EMS
Hardware Programming Manager (HPM)	5.8.0.0	EMS
Election Reporting Manager (ERM)	7.8.0.0	EMS

### 3.0 MATERIALS REQUIRED FOR TESTING (CONTINUED)

#### 3.4 Deliverable Materials (continued)

**Table 3-6 Deliverable Materials (continued)**

<b>Deliverable Material</b>	<b>Version</b>	<b>Description</b>
Log Monitor	1.0.0.0	EMS
AutoMARK Management Information System (AIMS)	1.3.257	EMS
VAT Previewer	1.3.2907	EMS
DS200	Firmware 1.6.0.0; Hardware 1.2.1	Precinct ballot scanner
Model 100	Firmware 5.4.4.5; Hardware 1.3.0	Optical scan precinct scanner
Model 650	Firmware 2.2.2.0; Hardware 1.1 and 1.2	Central ballot scanner
AutoMARK	Firmware 1.3.2907; Hardware 1.0, 1.1 and 1.3.1	Voter Assist Terminal
Transport Media (512MB, 2GB, 4GB, and 8GB)	---	USB flash drives
Headphones	Avid FV 60	Stereo headphones
Voting System Overview	Unity 3.4.0.0	TDP Document
ES&S DS200 System Operations Procedures	1.6.0.0	TDP Document
ES&S AM System Operations Procedures	7.5.2.0	TDP Document
ES&S EDM System Operations Procedures	7.8.1.0	TDP Document
ES&S ERM System Operations Procedures	7.8.0.0	TDP Document
ES&S ESSIM System Operations Procedures	7.7.1.0	TDP Document
ES&S HPM System Operations Procedures	5.8.0.0	TDP Document
ES&S LogMonitor System Operations Procedures	1.0.0.0	TDP Document
ES&S M100 System Operations Procedures	Firmware 5.4.4.5; Hardware 1.3.0	TDP Document
ES&S M650 System Operations Procedures	Firmware 2.2.2.0; Hardware 1.1 and 1.2	TDP Document
Voting System Security Specification Unity 3.4.0.0	3.4.0.0	TDP Document
Jurisdiction Security Practices Template	1.0.0.1	TDP Document
Voting System Validation Guide	1.0	TDP Document
Secure File Transfer Communications Server Configuration Guide	1.0	TDP Document

## 4.0 TEST SPECIFICATIONS

Certification testing of the Unity 3.4.0.0 System is to the configuration submitted in the EAC application ESS1103. Wyle qualified personnel will ensure that all certification testing performed on the manufacturer's voting system follows Wyle's procedures for testing and the specific test cases to ensure the requirements of the EAC 2005 VVSG and EAC Testing and Certification Program Manual. Below is a list of EAC Request for Interpretations (RFI) and Notice of Clarifications (NOC) that will be incorporated in the test campaign:

### Interpretations

2010-08 EAC Decision on Calling Sequence  
2010-07 EAC Decision on Module Length  
2010-06 EAC Decision on DRE Accessibility Requirements and Other Accessible Voting stations  
2010-05 EAC Decision on Testing of Modifications to a Certified System  
2010-04 EAC Decision on Functional Requirements with Respect to Security  
2010-03 EAC Decision on Database Coding Conventions  
2010-02 EAC Decision on Coding Conventions  
2010-01 EAC Decision on Voltage Levels and ESD Test  
2009-06 EAC Decision on Temperature and Power Variation  
2009-05 EAC Decision on T-Coil Requirements  
2009-04 EAC Decision on Audit Log Events  
2009-03 EAC Decision on Battery Backup for Central Count Systems  
2009-02 EAC Decision on Alternate Languages  
2009-01 EAC Decision on VVPAT Accessibility New  
2008-12 EAC Decision on Ballot Marking Device/Scope of Testing  
2008-10 EAC Decision on Electrical Fast Transient  
2008-09 EAC Decision on Safety Testing  
2008-08 EAC Decision on Automatic Bar Code Readers  
2008-07 EAC Decision on Zero Count to Start Election  
2008-06 EAC Decision on Battery Backup for Central Count  
2008-05 EAC Decision on Durability  
2008-04 EAC Decision on Supported Languages  
2008-03 EAC Decision on OS Configuration  
2008-02 EAC Decision on Battery Backup for Optical Scan Voting Machines  
2008-01 EAC Decision on Temperature and Power Variation  
2007-06 EAC Decision on Recording and Reporting Undervotes  
2007-05 EAC Decision on Testing Focus and Applicability  
2007-04 EAC Decision on Presentation of Alternative Language  
2007-03 EAC Decision on Summative Usability Testing

#### 4.0 TEST SPECIFICATIONS (CONTINUED)

##### Interpretations (continued)

2007-02 EAC Decision on Variable Names

2007-01 EAC Decision on Accessible Design

##### Notice of Clarifications

NOC 09-005 – Development and Submission of Test Plans for Modifications to EAC Certified Systems

NOC 09-004 – Development and Submission of Test Reports

NOC 09-003 – De Minimis Change Determination Requirement

NOC 09-002 -- Laboratory Independence Requirement

NOC 09-001 -- Requirements for Test Lab Development and Submission of Test Plans

NOC 08-003 -- EAC Conformance Testing Requirements

NOC 08-002 -- EAC Mark of Certification

NOC 08-001 -- Validity of Prior Non-core Hardware Environmental and EMC Testing

NOC 07-005 -- Voting System Test Laboratory Responsibilities in the Management and Oversight of Third Party Testing

NOC 07-004 -- Voting System Manufacturing Facilities

NOC 07-003 -- State Testing Done in Conjunction with Federal Testing within the EAC Program

NOC 07-002 -- VSTL Work with Manufacturers Outside of Voting System Certification Engagements

NOC 07-001 -- Timely Submission of Certification Application

#### 4.1 Requirements (Strategy of Evaluation)

The strategy for evaluating ES&S Unity 3.4.0.0 will be to review the change log and the engineering changes submitted for the modified system. Wyle will test to determine if the software and hardware have met all applicable EAC 2005 VVSG requirements.

This test campaign includes the following tests:

- Technical Data Package review to ensure all modifications are documented as applicable.
- Functional integration test to ensure the EMS and DS200 are interoperable.
- A Physical Configuration Audit to baseline the system in scope.
- A Logic & Accuracy Test to the VVSG on the DS200 with the results being tallied by the EMS
- Security Testing

Wyle personnel shall maintain a test log of the procedure(s) employed. This log identifies the system and equipment by model and serial number. In the event that the Wyle project engineer deems it necessary to deviate from requirements pertaining to the test environment, the equipment arrangement and method of operation, the specified test procedure, or the provision of test instrumentation and facilities, the deviation shall be recorded in the test log. (A discussion of the reasons for the deviation and the effect of the deviation on the validity of the test procedure shall also be provided and approved). All internal procedures shall be followed and documented.

## **4.0 TEST SPECIFICATIONS (CONTINUED)**

### **4.1 Requirements (Strategy of Evaluation) (continued)**

The designated Wyle Operating Procedures (WoP's) for this program are listed below together with the identification and a brief description of the hardware and software to be tested and any special considerations that affect the test design and procedure.

- WoP 1 Operations Status Checks
- WoP 2 Receipt Inspection
- WoP 3 Technical Data Package Review (In Scope)
- WoP 4 Test Plan Preparation (*This document*)
- WoP 25 Physical Configuration Audit (In Scope)
- WoP 30 System Integration Test (functional integration test on DS200 with modem)
- WoP 31 Telecommunications
- WoP 41 Logic & Accuracy
- WoP 6 Security
- WoP 34 Test Report

### **4.2 Hardware Configuration and Design**

This test campaign requires no hardware testing. The hardware used in this test campaign will be configured for normal use on Election Day.

### **4.3 Software System Functions**

The strategy for this test campaign will be to treat the components: DS200 with modem, RAS Server, Firewall, and EMS, as black box components due to the scope of the test program. The approach will be to verify that the DS200, with modem, interfaces correctly with the EMS.

### **4.4 Security Functions**

The purpose of the security testing will be to evaluate the effectiveness of the modem capabilities of the Unity 3.4.0.0 System in detecting, preventing, logging, and recovering from any security risks identified by simulating attacks on the system. To accomplish this, Wyle will utilize internal operating procedures (WoP 6 series) and designed special test cases to evaluate the modem to the security requirements set forth in the EAC 2005 VVSG. These procedures have been specifically tailored to assess the modem to the applicable requirements. Wyle will attempt to defeat the access controls and physical security measures documented in the ES&S technical data package. A threat matrix will be created to determine the risks and vulnerabilities.

Testing will be performed by Wyle personnel and a qualified security expert. Wyle will report all findings to ES&S for comment and/or resolution. A report containing all findings will be issued to the EAC as an addendum to the final test report.

#### 4.0 TEST SPECIFICATIONS (CONTINUED)

#### 4.5 TDP Evaluation

Wyle qualified personnel will perform a review of the ES&S TDP to determine compliance to the EAC 2005 VVSG, EAC requirements, and ES&S-specific requirements. The focus of this review will be on any modifications made to the TDP documents due to the inclusion of the modeling.

During the TDP review process, each document will be reviewed for completeness, clarity, and correctness, and continuity between the TDP documents. The review results will be formally reported to ES&S for resolution. If a revised document is received, it will be re-reviewed as discussed in this section.

The TDP will be continuously reviewed during the entire testing process as these documents will be utilized to set up the systems, verify correct operational results and numerous other tests. At the end of the TDP review process, an Anomaly Report will be issued listing the non-compliant items on a document-by-document basis.

A listing of all documents contained in the ES&S Unity 3.4.0.0 System TDP is provided in Table 4-2.

**Table 4-2 Unity 3.4.0.0 TDP Documents**

<b>Unity 3.4.0.0 TDP Documents</b>	<b>Version</b>	<b>Doc #</b>	<b>Document Code</b>
Voting System Overview	2.0	01-01	U3400_OVR00
<b><i>System Functionality Description</i></b>			
System Functionality Description – Audit Manager	1.0	02-01	U3400_SFD00_AM
System Functionality Description – Election Data Manager	1.0	02-02	U3400_SFD00_EDM
System Functionality Description – ES&S Ballot Image Manager	1.0	02-03	U3400_SFD00_ESSIM
System Functionality Description – Hardware Programming Manager	1.0	02-04	U3400_SFD00_HPM
System Functionality Description – Election Reporting Manager	1.0	02-05	U3400_SFD00_ERM
System Functionality Description – DS200	1.0	02-06	U3400_SFD00_DS200
System Functionality Description – Model 650	1.0	02-07	U3400_SFD00_M650
System Functionality Description – Log Monitor	1.0	02-08	U3400_SFD00_Log Monitor
System Functionality Description – Model 100	1.0	02-09	U3400_SFD00_M100
<b><i>System Hardware Specification</i></b>			
System Hardware Specification – DS200	1.0	03-01	U3400_SHS00_DS200
System Hardware Specification – Model 650	1.0	03-02	U3400_SHS00_M650
System Hardware Specification – Model 100	1.0	03-03	U3400_SHS00_M100



**4.0 TEST SPECIFICATIONS (CONTINUED)**

**4.5 TDP Evaluation (continued)**

**Table 4-2 Unity 3.4.0.0 TDP Documents (continued)**

Unity 3.4.0.0 TDP Documents	Version	Doc #	Document Code
<b><i>Software Design and Specification</i></b>			
Software Design and Specification – Audit Manager	1.0	04-01	U3400_SDS00_AM
Software Design and Specification – Election Data Manager	1.0	04-02	U3400_SDS00_EDM
Software Design and Specification – ES&S Ballot Image Manager	1.0	04-03	U3400_SDS00_ESSIM
Software Design and Specification – Hardware Programming Manager	1.0	04-04	U3400_SDS00_HPM
Software Design and Specification – Election Reporting Manager	1.0	04-05	U3400_SDS00_ERM
Software Design and Specification – DS200	1.0	04-06	U3400_SDS00_DS200
Software Design and Specification – Model 650	1.0	04-07	U3400_SDS00_M650
Software Design and Specification – Log Monitor	1.0	04-08	U3400_SDS00_LogMonitor
SDS Appendix	1.0	04-10	File Specifications: BDF, BSC, EDMXML, EL80, ESSCRYPT, ESSML, IFC, LDF, M650 OUTPUT
<b><i>System Security Specification</i></b>			
System Security Specification	1.0	05-01	U3400_SSS00
SSS Appendix – Jurisdiction Security Procedures Template	1.0.0.1	05-02	U3400_SSS01_JSP Template
SSS Appendix – Validation Guide – DS200	1.0	05-02	U3400_SSS02.02_DS200 Validation Guide
SSS Appendix – Validation Guide – Model 650	1.0	05-02	U3400_SSS02.03_Model 650 Validation Guide
SSS Appendix – Validation Guide – AutoMARK	1.0	05-02	U3400_SSS02.04_AutoMARK Validation Guide
SSS Appendix – Validation Guide – Unity Workstation	1.0	05-02	U3400_SSS02.05_Unity Workstation Validation Guide
SSS Appendix – System Hardening Procedures	1.0	05-02	U3400_SSS08_Hardening Procedures
<b><i>System Test/Verification Specification</i></b>			
Unity 3.4.0.0 System Test Plan	1.0	06-01	U3400_STP00
System Test Cases – Audit Manager	1.0	06-02	U3400_TC00_AM
System Test Cases – Election Data Manager	1.0	06-03	U3400_TC00_EDM
System Test Cases – ES&S Ballot Image Manager	1.0	06-04	U3400_TC00_ESSIM

4.0 TEST SPECIFICATIONS (CONTINUED)

4.5 TDP Evaluation (continued)

Table 4-2 Unity 3.4.0.0 TDP Documents (continued)

Unity 3.4.0.0 TDP Documents	Version	Doc #	Document Code
System Test Cases – Hardware Programming Manager	1.0	06-05	U3400_TC00_HPM
System Test Cases – Election Reporting Manager	1.0	06-06	U3400_TC00_ERM
System Test Cases – DS200	1.0	06-07	U3400_TC00_DS200
System Test Cases – Model 650	1.0	06-08	U3400_TC00_M650
System Test Cases – Model 100	1.0	06-09	U3400_TC00_M100
<i>Systems Operations Manual</i>			
System Operations Procedures – Audit Manager	5.2.2011	07-01	U3400_SOP00_AM
System Operations Procedures – Election Data Manager	5.2.2011	07-02	U3400_SOP00_EDM
System Operations Procedures – ES&S Ballot Image Manager	5.2.2011	07-03	U3400_SOP00_ESSIM
System Operations Procedures – Hardware Programming Manager	5.2.2011	07-04	U3400_SOP00_HPM
System Operations Procedures – Election Reporting Manager	5.2.2011	07-05	U3400_SOP00_ERM
System Operations Procedures – DS200	5.2.2011	07-06	U3400_SOP00_DS200
System Operations Procedures – Model 650	5.2.2011	07-07	U3400_SOP00_M650
SOP Appendix- Sample Deliverable Timeline	N/A	07-08	U3400_SOP01_Sample Deliverable Timeline
SOP Appendix- Adobe Install Reference	N/A	07-08	U3400_SOP02_Adobe Install Reference
SOP Appendix- Omni Drive USB	N/A	07-08	U3400_SOP00_LogMonitor
Systems Operations Procedures- Log Monitor	5.2.2011	07-09	U3400_SOP00_OmniDrive USB
Systems Operations Procedures- Model 100	5.2.2011	07-10	U3400_SOP00_M100
<i>System Maintenance Manuals</i>			
System Maintenance Manual – DS200	5.2.2011	08-01	U3400_SMM00_DS200
System Maintenance Manual – Model 650	5.2.2011	08-02	U3400_SMM00_M650
System Maintenance Manual – Model 100	5.2.2011	08-03	U3400_SMM00_M100

#### 4.0 TEST SPECIFICATIONS (CONTINUED)

#### 4.5 TDP Evaluation (continued)

Table 4-2 Unity 3.4.0.0 TDP Documents (continued)

Unity 3.4.0.0 TDP Documents	Version	Doc #	Document Code
<b><i>Deployment and Training</i></b>			
Personnel Deployment and Training Recommendations	5.2.2011	09-01	U3400_TRN00_ESSTraining Requirements
Training Manual – Election Data Manager	5.2.2011	09-02	U3400_TRN00_EDM_Training Manual
Training Manual – ES&S Ballot Image Manager	5.2.2011	09-03	U3400_TRN00_ESSIM_Training Manual
Training Manual – Hardware Programming Manager	5.2.2011	09-04	U3400_TRN00_HPM_TrainingManual
Training Manual – Election Reporting Manager	5.2.2011	09-05	U3400_TRN00_ERM_TrainingManual
Training Checklists		09-06	Multiple Documents
<b><i>Configuration Management Plan</i></b>			
ES&S Configuration Management Plan	1.0	10-1	U3400_CMP00
CM Plan Appendices	---	10-2	Multiple Documents
<b><i>QA Program</i></b>			
Quality Assurance Program - Manufacturing	1.0	11-01	U3400_QAP00_MNF
Quality Assurance Program – Software and Firmware	1.0	11-02	U3400_QAP00_SWF
QAP Program Appendices	---	11-03	Multiple Documents
<b><i>System Change Notes</i></b>			
Unity 3.4.0.0 System Change Notes	1.0		---
<b><i>Other VSTL Reports</i></b>			
ES&S Ballot Production Guide	1.31.2011	13-01	U3400_ORPT02_BallotProductionGuide

#### 4.6 Source Code Review

The source code for the DS200 with modem component and the EMS components of the ES&S Unity 3.4.0.0 System will be reviewed to the EAC 2005 VVSG coding standards and the manufacturer supplied coding standards. Specifically, a functional source code review will be performed to verify that the new software interface modules do not conflict with the existing software interface modules in HPM and ERM. Based on this review, system integration testing with all components of the ES&S Unity 3.4.0.0 System may be required.

As the source code is received, an SHA1 hash value will be created for each source code file. The source code team will then conduct a visual scan of every line of source code for an initial review and every line of modified source code for a re-review. This is done to identify any violation of EAC 2005 VVSG coding standards or manufacturer supplied coding standards. Each identified violation will be recorded by making notes of the standards violation along with directory name, file name, and line number.

During the initial review, the source code team will perform a peer-review on a percentage of the code. This is done to evaluate the correctness of the review and look for standards violations that may have been missed or violations that were noted in error. Any standards violations that the team concludes are recorded in error or missed are then corrected in the code review notes.

## 4.0 TEST SPECIFICATIONS (CONTINUED)

### 4.6 Source Code Review (continued)

A technical summary report of all identified standards violations will be sent to ES&S for resolution. ES&S will then correct all standards violations and re-submit the source code for re-review. This process will be repeated as many times as necessary, until all identified standards violations are corrected. All reports will be included in an anomaly report for source code and submitted to the EAC and included in the final test report.

A “Compliance Build” will be built by Wyle from the reviewed source code using the Compliance Build Procedure to build iterative builds throughout the test campaign. This process follows the documented procedure in the EAC Testing and Certification Program Manual, Version 1.0, effective date January 1, 2007 with two exceptions: The image products will not be submitted to the EAC, and no manufacturer representative will be required to be present or on-site for these builds.

The final step in the source code review will be to create a “Trusted Build” from the reviewed source code. The “Trusted Build” follows the steps below:

- Clean the build machine
- Retrieve the compliant source code
- Retrieve the installation media for OS, compilers, and build software
- Construct the build environment
- Create digital signatures of the build environment
- Load the compliant source code into the build environment
- Create a digital signature of the pre build environment
- Create a disk image of the pre-build environment
- Build executable code
- Create a digital signature of executable code
- Create a disk image of the post-build environment
- Build installation media
- Create a digital signature of the installation media
- Install executable code onto the system to validate the software/firmware
- Deliver source code with digital signature, disk image of pre-build environment with digital signatures, disk image of post-build environment with digital signatures, executable code with digital signatures, and installation media with signatures to EAC Approved Repository.

The “Trusted Build” for the ES&S Unity 3.4.0.0 System includes source code, data, and script files, in clear text form. The build also includes COTS software on commercially available media, COTS software downloaded by the VSTL, COTS software verified by digital signature from the software supplier, and picture and sound files in binary format provided by ES&S. The first step of the process is to clean the hard drives by writing zeros to every spot on the hard drive, so the drive is cleared of existing data. The operating system will then be loaded and the applications from the VSTL reviewed source along with the VSTL verified COTS software will be built. The final step is installing the applications on the hardware.

#### **4.0 TEST SPECIFICATIONS (CONTINUED)**

##### **4.7 QA and CM System Review**

Both the ES&S QA Plan and CM Plan will be reviewed to determine compliance with EAC 2005 VVSG Volume II Section 2, and Volume I Sections 8 and 9, EAC stated requirements, and with the requirements of the internal ES&S documentation. Also, the ES&S TDP documentation package will be reviewed to determine if the ES&S QA Plan and the CM Plan are being followed. The results of the TDP review will be entered on a spreadsheet as previously described in Section 4.6 TDP Evaluation of this test plan. The results of the TDP review, including the QA and CM compliance results Technical Data Package Review. The results of the TDP review will also be included in the final Test Report.

#### **5.0 TEST DATA**

##### **5.1 Test Data Recording**

All equipment utilized for test data recording shall be identified in the test data package. The output test data will be recorded in an appropriate manner as to allow for data analysis. For source code and TDP reviews, results will be compiled in output reports and submitted to ES&S for resolution. Additionally, all test results, including functional test data, will be recorded on the relevant Wyle Laboratories' Operating Procedure and Test Cases. Results will also be recorded real-time in engineering log books. Incremental reports will be submitted to ES&S and the EAC at the completion of major test areas to communicate progress and results as deemed necessary by the stakeholders.

##### **5.2 Test Data Criteria**

Wyle will evaluate all test results against the ES&S-provided technical documentation for the Unity 3.4.0.0 System and the requirements set forth in the EAC 2005 VVSG. The acceptable range for system performance and the expected results for each test case shall be derived from the Unity 3.4.0.0 System documentation and the 2005 VVSG. Per the EAC 2005 VVSG, these parameters shall encompass the test tolerances, the minimum number of combinations or alternatives of input and output conditions that can be exercised to constitute an acceptable test of the parameters involved, and the maximum number of interrupts, halts or other system breaks that may occur due to non-test conditions (excluding events from which recovery occurs automatically or where a relevant status message is displayed).

##### **5.3 Test Data Reduction**

Test data shall be manually processed and recorded in the relevant Wyle Operating Procedures and Test Cases. Results will also be recorded real-time in engineering log books.

#### **6.0 TEST PROCEDURES AND CONDITIONS**

The following subsections describe test procedures and a statement of the criteria by which readiness and successful completion shall be indicated and measured.

##### **6.1 Facility Requirements**

All testing will be conducted at the Wyle Huntsville, AL facility unless otherwise annotated.

## 6.0 TEST PROCEDURES AND CONDITIONS (CONTINUED)

### 6.2 Test Set-Up

All voting machine equipment (hardware and software), shall be received and documented utilizing Wyle Receiving Ticket (WL-218, Nov'85) and proper QA procedures. When voting system hardware is received, Wyle Shipping and Receiving personnel will notify Wyle QA personnel. With Wyle QA personnel present, each test article will be unpacked and inspected for obvious signs of degradation and/or damage that may have occurred during transit. Noticeable degradation and/or damage, if present, shall be recorded, photographs shall be taken, and the ES&S Representative shall be notified.

Wyle QA personnel shall record the serial numbers and part numbers. Comparison shall be made between those numbers recorded and those listed on the shipper's manifest. Any discrepancies noted shall be brought to the attention of the ES&S Representative for resolution. TDP items, including all manuals, and all source code modules received will be inventoried and maintained by the Wyle Project Engineer assigned to testing.

For test setup, the system will be configured as would for normal field use. This includes connecting all supporting equipment and peripherals. Wyle personnel will properly configure and initialize the system, and verify that it is ready to be tested, by following the procedures detailed in the Unity 3.4.0.0 System technical documentation. Wyle will develop an Operational Status Check to be performed prior to and immediately following each hardware test. Wyle will develop the system performance levels to be measured during operational tests.

Wyle has developed eight election definitions to be used during this test campaign.

#### Operational Status Check

This election definition will exercise the operational status of the DS200, during the operational tests, and prior to and immediately following the non-operational hardware tests.

#### Logic and Accuracy

This test must exercise that the DS200 can transmit results accurately to Election Reporting Manager (ERM). Ballots will be scanned into the DS200 and the results from both the results printout and the USB stick will be verified with received results in Election Reporting Manager (ERM). A variety of elections with different data and size will be transmitted. These include:

#### General Election: GEN-01

A basic election held in 4 precincts one of which is a split precinct. This election contains 19 contests compiled into 4 ballot styles. 5 of the contests are in all 4 ballot styles. The other 15 contests are split between at least 2 of the precincts with a maximum of 4 different contest spread across the 4 precincts.

#### General Election: GEN-02

A basic election held in 3 precincts. This election contains 15 contests compiled into 3 ballot styles. 10 of the contests are in all 3 ballot styles with the other five split across the 3 precincts.

#### General Election: GEN-03

A basic election held in 2 precincts. This election contains 8 contests and compiled into 2 ballot styles. 4 of the contests are in both ballot styles. The other 4 contests are split between the two precincts.

## 6.0 TEST PROCEDURES AND CONDITIONS (CONTINUED)

### 6.3 Test Sequence

The DS200 with modem component of the Unity 3.4.0.0 System will undergo all applicable tests in the EAC 2005 VVSG. The following sections provide a list of each test, a brief description of each, and a location of each test. Wyle will utilize a combination of functional testing, source code review, and TDP reviews to evaluate the DS200. The list of tests is not in a specific sequence.

#### 6.3.1 Hardware Test Descriptions

No hardware testing will be performed as part of this test campaign.

#### 6.3.2 Software Test Description

The software tests include the following:

Source Code Compliance Review – Wyle Laboratories personnel will compare the source code to the manufacturer's software design documentation to ascertain how completely the software conforms to the manufacturer's specifications. Source code inspection shall also assess the extent to which the code adheres to the requirements in Section 5 of Volumes I and II.

Compliance Build of the Unity 3.4.0.0 System Software, Firmware, and Utilities– Before testing can begin a compliance build of all the applications will be constructed by Wyle personnel using the build environment, build documentation and reviewed source code. This is to insure the software being tested is constructed from the same source code that was reviewed.

Security Source Code Review – The security source code review is a detailed review of the functionality of the source code that has been submitted. Both a manual line by line review and an automated analysis of the source code will be performed.

Trusted Build – The trusted build is a process of converting the reviewed source code into machine-readable binary instructions for a computer. This test will follow Section 5.6 of the EAC Testing and Certification Program manual.

**Table 6-1 Unity 3.4.0.0 System Software Test Sequence**

Test	Description	Procedure	Test Level	Specimen
<i>Compliance Source Code Review (Pre-testing Activity)</i>	Source code review for compliance	WHVS07.2 WOP 5a	Component	Source Code
<i>Compliance Build</i>	Using the build documents and source code to construct the EMS	WHVS07.3 WOP 7b	Component	Source Code
<i>Source Code Functional Review</i>	Source code review for functionality and high level software design	WHVS07.2 WOP5b	Component	Source Code
<i>Source Code Security Review (manual – automated)</i>	Source code review for specific security concerns and an automated review using Fortify	WHVS07.2 WOP5c WOP 6a	Component	Source Code

## 6.0 TEST PROCEDURES AND CONDITIONS (CONTINUED)

### 6.3 Test Sequence (continued)

#### 6.3.3 System Testing

Physical Configuration Audit – The Physical Configuration Audit compares the voting system components submitted for qualification to the manufacturer’s technical documentation, and shall include the following activities:

- Establish a configuration baseline of software and hardware to be tested; confirm whether manufacturer’s documentation is sufficient for the user to install, validate, operate, and maintain the voting system
- Verify software conforms to the manufacturer’s specifications; inspect all records of manufacturer’s release control system; if changes have been made to the baseline version, verify manufacturer’s engineering and test data are for the software version submitted for certification
- Review drawings, specifications, technical data, and test data associated with system hardware, if non-COTS, to establish system hardware baseline associated with software baseline
- Review manufacturer’s documents of user acceptance test procedures and data against system’s functional specifications; resolve any discrepancy or inadequacy in manufacturer’s plan or data prior to beginning system integration functional and performance tests
- Subsequent changes to baseline software configuration made during testing, as well as system hardware changes that may produce a change in software operation are subject to re-examination

TDP Review – The technical data package must be submitted as a precondition of national certification testing. These items are necessary to define the product and its method of operation; to provide technical and test data supporting the manufacturer’s claims of the system’s functional capabilities and performance levels; and to document instructions and procedures governing system operation and field maintenance. Any information relevant to the system evaluation shall be submitted to include source code, object code, and sample output report formats.

Security Test – The security test is designed and performed to test the capabilities of the voting system against the requirements defined in Volume I Section 7. These procedures shall focus on the ability of the system to detect, prevent, log, and recover from a broad range of security risks identified. This test will also examine system capabilities and safeguards claimed by ES&S in the TDP to go beyond these risks. The range of risks tested is determined by the design of the system and potential exposure to risk.

Logic and Accuracy – The logic and accuracy test insures the voting system and telecommunications can process 1,549,703 consecutive ballot positions accurately and reliably within the Mean Time Between Failure (MTBF) ratio. This test must exercise that the DS200 can transmit results accurately to ERM.



**6.0 TEST PROCEDURES AND CONDITIONS (CONTINUED)**

**6.3 Test Sequence (continued)**

**6.3.3 System Testing**

**Table 6-2 Unity 3.4.0.0 System Testing Sequence**

Test	Description	Procedure	Test Level	Specimen	Election Data
<i>Technical Data Package (TDP) Review</i>	Documentation review for compliance, correctness, and completeness	WHVS07.1 WOP 3	Document	TDP package	---
<i>Physical Configuration Audit</i>	Audit hardware and software models and versions	WHVS07.3 WOP 25	Component & System	System hardware and software	---
<i>Security</i>	Assess the system to the 2005 VVSG requirements and execute basic system security tests.	WHVS07.7 WOP 6 WOP 6a WOP 6b WOP 6c WOP 6d	Integration & System	System	Gen-01 Prim - 01
<i>Logic and Accuracy</i>	Test of accuracy to ~1.6 million ballot positions	WHVS07.9 WOP 41	System	System	L&A Election
<i>Trusted Build</i>	Creation and installation of the final system software	WHVS07.6 WOP 7 WOP 7a	Component	System software	Unity 3.4.0.0 Source Code Package

**7.0 TEST OPERATIONS PROCEDURES**

**7.1 Proprietary Data**

All proprietary data that is marked will be distributed only to those persons that the manufacturer or EAC identifies as needing the information to conduct of qualification testing. The manufacturer is required to mark all proprietary documents as such. All organizations and individuals receiving proprietary documents will ensure those documents are not available to non-authorized persons.

**APPENDIX A**

**Project Schedule**

*To be provided separately*

**APPENDIX B**

**Table 3-3 Unity 3.4.0.0 Third Party Build Software Description**

**Appendix B, Page No. B-2 of 13**  
**Certification Test Plan T58722.01, Rev. A**

Software Product	Software Version	Filename	Hash Value
<b>EMS Build Environment</b>			
Apache Software Foundation Xerces-C++	2.7.0	xerces-c_2_7_0-windows_2000-msvc_60.zip	1887a204bfd208971daf993881e331a99ca89f8f
Avocet ADX-Z180	5.2	Original CD	N/A
Business Objects Crystal Reports	9 Developer	Original CD	N/A
Business Objects Crystal Reports	9 Developer Hot Fix (05/14/2003)	cr90dbexwin_en.zip	6086c0de9072136b263047f40862d22c1b46702b
Business Objects Crystal Reports	9 Developer Hot Fix (05/14/2003)	cr90mainwin_en.zip	3086da615d8178bed4af5c8a7d2500b8b96b50cc
CodeSynthesis XSD (Includes Apache Software Foundation Xerces C++ 2.8.0)	3.1.0	xsd-3.1.msi	aa5f2fb2c815e8e1aa94314c08697751d056690b
CSM PC-Card SDK	2.20	Original CD	N/A
InstallShield Software InstallShield	Professional 7.01	Original CD	N/A
MacroVision InstallShield	2008 Premier Edition	Original CD (two disk set)	N/A
MacroVision InstallShield Standalone Build Script Objects	2008 Premier Edition	installshieldinstallsc riptobjects.exe	N/A
MicroFocus (Liant) RM/COBOL Development System	11.01	setup.exe	b8b2a175511130633d6f10bcb2545f732944caf8
MicroFocus (Liant) WOW Designer	11.01	setup.exe	23a6d81415db51683360dd55e8c11eb091610c4f
Microsoft Visual Studio	6.0 Enterprise Edition	Original CD (three disk set)	N/A
Microsoft Visual Studio	6.0 Service Pack 6	Vs6sp6.exe	2292437a8967349261c810ae8b456592eeb76620
Microsoft Visual Studio	2005 Professional Edition	Original CD (two disk set)	N/A
Microsoft Visual Studio	2005 Service Pack 1	VS80sp1- KB926601-X86- ENU.exe	d4b5c73253a7a4f5b4b389f41b94fea4a7247b57
Microsoft Windows	XP Professional with Service Pack 3	Original CD	N/A
RoboHelp	9	Original CD	N/A

**Appendix B, Page No. B-3 of 13**  
**Certification Test Plan T58722.01, Rev. A**

Office			
RSA BSAFE Crypto-C	Micro Edition (ME) 3	r_unpack.exe	5c48f05c4cf65784f5b129e15a0538361193f015
RSA BSAFE Crypto-C	Micro Edition (ME) 3	cryptocme- 3_0_0_1- win32vc8.pkg	30fb23005a0e315a5eecee37cfbf64b3e3f62b20

Software Product	Software Version	Filename	Hash Value
<b>EMS Build Environment</b>			
Sequiter Codebase	6.5 Release 3	cb_setup.exe	797ad01a3297fb36cbf0bd7313d904f1d32714b0
SourceForge Boost C++ Libraries	1.34.1	boost_1_34_1.zip	90a10d2e3591fcaa2b8cd10121980133af3eb2ff
SourceForge Boost C++ Libraries	1.34.1	libboost_filesystem- vc80-mt-s- 1_34_1.zip	5bdd6acc0e9aa1894c52cc3a71c0f6f2387f28d0
Young Dynamic Software vbAdvance	3.1	vbAdvance3_1.exe	25d7f60e7f02fb461856b80e45f2cc37c191debb
InfoZip	2.32	unzip.exe	e1652b058195db3f5f754b7ab430652ae04a50b8
InfoZip	5.52	zip.exe	55c5a72010291fca2275ccfb5b497dd0bac11a60
MarshallSoft	0.0.0.0 Linker Rev. 3	WSC32.DLL	ac0d9b7d7ac30e98af162735bc9e7b1b24c48d23
Microsoft	2.40.4275.1	asycfilt.dll	72fb4f088c6ac02097b55fb267c76fbf5e0fa1f7
Microsoft	4.71.1460.1	COMCAT.DLL	2a409311853ad4608418e790621f04155e55000
Microsoft	6.7.0.8988	COMCT32.OCX	398f64c00b026d1c6d94a6efd180f20c010f5ee9
Microsoft	6.0.84.18	COMDLG32.OCX	34e4213d8bf0e150d3f50ae0bd3f5b328e1105f5
Microsoft	6.0.8447.0	MFC42D.DLL	4fd93acca2de6c40f40e54ada9e6e17a18688dc9
Microsoft	6.0.88.4	MSCOMCT2.OCX	c0c55de97f41a24bf50b2d08eb428371bb4a3cce
Microsoft	6.0.88.62	MSCOMCTL.OCX	d904d2fa7639c38ffb6e69f1ef779ca1001b8c18
Microsoft	6.4.9.1128	msdxm.ocx	5ec3d82bbf004b82e0232e56fc7105ea26df59b2
Microsoft	6.1.43.19	MSVBVM50.DLL	75d05db7085de3222951eaa5fee2b74feaf88e17
Microsoft	6.0.89.64	MSVBVM60.DLL	ce82d1ccf593088d09694ef90e44c4ea2761be92
Microsoft	6.0.8168.0	MSVCP60.DLL	8770ec0910b7cc9a0461a40dfb495ee7f5b4267b
Microsoft	6.0.8168.0	MSVCP60D.DLL	6de04508e27dd7022a4d4826b0f15d702fdd9f8a
Microsoft	6.0.8797.0	msvcrt.dll	63a4fcd64ecea975c1b91de04702c68a9f2a3c7d
Microsoft	5.0.0.7022	MSVCRTD.DLL	d24d0335eae1cfa63c8a68718b54ce223baee9d3
Microsoft	2.40.4275.1	oleaut32.dll	6b58e20b2538cb308091da838710f6aad933a301
Microsoft	5.0.4275.1	olepro32.dll	8adff69050d14a57d7f553ca8978439af188c192
Microsoft	6.4.2600.1221	quartz.dll	607329d446b344209ade8b501ba37893b95f3e2a
Microsoft	6.0.88.4	RICHTX32.OCX	90fec763edfb0b0924700be6b914292c591a152c
Microsoft	2.40.4275.1	stdole2.tlb	36f701ccce78a5d218fea23fd05351890f14cf7d
Microsoft	6.0.81.69	SYSINFO.OCX	fc5cd0599a43faebf9e7e9179defb79999215286
Microsoft	6.0.90.43	TABCTL32.OCX	e8648d6d69fd5cf900c4bf98b210f6921bed3ef5
RoboHelp 2000	8.0.131.0	ROBOEX32.DLL	964d83c7f4dedc10241408de04e7d44cb599ef3d
RoboHelp X5	13.10.606.0	wh2robo.dll	4ff22cf837373459232906078dc1d4d1464598db
Shamir Optical	1.0.0.0	OpenSaveFile.ocx	47f736752a9894553ec11134bffcd5a4455e29ef
<b>AutoMARK Build Environment</b>			
AutoIt Consulting AutoIt	3.2.10.0	autoit-v3-setup.exe	bb913c21b1eeb8a580ea226d0a524f339d752596
Applied Data Systems Xscale	4.2	ADS_XSCALE_4_ 2_SDK.msi	991746a6251c28fe8b28b439c00565f23603f35e
Atmel Flip for Windows	2.4.6	flip-2_4_6.zip	02877cdbd07c74c92b12c7ad14ca22411abc5045
Atmel Microcontroller ISP	1.0	Original CD	N/A

**Appendix B, Page No. B-4 of 13**  
**Certification Test Plan T58722.01, Rev. A**

Software			
Cosmic Software 68HC08 C Compiler	4.1h	Original CD	N/A
InfoZip Zip Utilities	Unknown	zip_utils_src.zip	17d8fc37a477de0c5e3217a2b82245bd3de2fae1

Software Product	Software Version	Filename	Hash Value
<b>AutoMARK Build Environment</b>			
Future Technology Devices Intl. Ltd. D2XX WinCE Driver	Unknown	ARM4D2XXDriver. zip	be6d74e8a9a038af3fadbddd30153609621267a9
Keil µVision2 Note: CD is misabeled µVision3	Release 04.2004	Original CD	N/A
Keil µVision2	Add-On Disk	Original 3.5" High- Density Floppy Diskette Note: Must transfer to a CD	N/A
MacroVision InstallShield Professional	10.5	Original CD	N/A
Microsoft Office	XP Professional 2002	Original CD	N/A
Microsoft SQL Server	2000 Enterprise Edition	Original CD	N/A
Microsoft Visual Studio	.Net 2003	Original CD	N/A
Microsoft Windows	XP Professional with Service Pack 2	Original CD	N/A
Microsoft Windows CE Platform Builder	5.0	Original CD	N/A
Microsoft Windows CE Platform Builder	Cumulative 2004 Update	WinCEPB50- 041231-Product- Update-Rollup- Armv4I.msi	2a33a1540e25118e9360e7298af7c96da206006f
Microsoft Windows CE Platform Builder	Cumulative 2005 Update	WinCEPB50- 051231-Product- Update-Rollup- Armv4I.msi	331f874c41fd2abe79ddc97ac9a47b91d203bdf9
Microsoft Windows CE Platform Builder	January 2006 Update	WinCEPB50- 060131-2006M01- Armv4I.msi	884241dd89bd1fda9683fb6d6ba14f1c82cf9b2c
Microsoft Windows CE Platform Builder	February 2006 Update	WinCEPB50- 060228-2006M02- Armv4I.msi	4695c80aff3707a1926ec54d0756af3a426d8e0f
Microsoft Windows CE Platform Builder	March 2006 Update	WinCEPB50- 060331-2006M03- Armv4I.msi	39dc323b9736441893322fc1b159bc94dd2ec3b5
Microsoft Windows CE Platform Builder	April 2006 Update	WinCEPB50- 060430-2006M04- Armv4I.msi	823c496b554f9d3d29cd491f80ffda9729176b89

**Appendix B, Page No. B-5 of 13**  
**Certification Test Plan T58722.01, Rev. A**

Microsoft Windows CE Platform Builder	May 2006 Update	WinCEPB50-060531-2006M05-Armv4I.msi	29df27801c8bd2a3a68567cfa65e1ff54de8ae63
Microsoft Windows CE Platform Builder	June 2006 Update	WinCEPB50-060630-2006M06-Armv4I.msi	7421d73ec31cd1e9250e6c591e14f00a98988f59

Software Product	Software Version	Filename	Hash Value
<b>AutoMARK Build Environment</b>			
Microsoft Windows CE Platform Builder	July 2006 Update	WinCEPB50-060731-2006M07-Armv4I.msi	f8ab5055a648ea23a64e3e89ef01e88ec9836b5c
Microsoft Windows CE Platform Builder	August 2006 Update	WinCEPB50-060831-2006M08-Armv4I.msi	43b5d5a6f1be643e9dd4af970dc1785188bbe622
Microsoft Embedded Visual C++	4.0	Original CD	N/A
Microsoft Embedded Visual C++	4.0 Service Pack 4	evc4sp4.exe	77d2cf961acc96fd78fdaa910f989a41010edd45
P&E Microcomputer Systems PKG08SZ 68HC08 Development Package	2006	Original CD	N/A
SpeechWorks International, Inc. ETI-Eloquence TTS Engine	6.1.0.0	chsrom.dll	f3ae8a1f7d0369d387b8f2ee0a47a76efee2bc2f
SpeechWorks International, Inc. ETI-Eloquence TTS Engine	6.1.0.0	eci.dll	7aa1085174b7bce6016c8074297bc6cb40b823df
SpeechWorks International, Inc. ETI-Eloquence TTS Engine	6.1.0.0	jpnrom.dll	7557c00e8ace29affdabebddb73f466d0877a866
SpeechWorks International, Inc. ETI-Eloquence TTS Engine	6.1.0.0	korrom.dll	76219d7f9f76f021b4815fa796f80e3ca49e3446
SpeechWorks International, Inc. ETI-Eloquence TTS Engine	6.1.0.0	chs.syn	ff7c1873b84256c25da601d70ad280333e5ce167
SpeechWorks International, Inc. ETI-Eloquence TTS Engine	6.1.0.0	enu.syn	3e69875d11e0a53c39c211c484cb6520f8d87f25
SpeechWorks International, Inc. ETI-Eloquence TTS Engine	6.1.0.0	esm.syn	d8037d86e5f677e89eca7834ae47fbd030a043aa
SpeechWorks International, Inc. ETI-Eloquence TTS Engine	6.1.0.0	jpn.syn	99a931e76e6008da9f01b91b4d91c116ece8f7d7
SpeechWorks International, Inc.	6.1.0.0	kor.syn	f32f8ae286ed278320dbb829df338b97a2c846b5

**Appendix B, Page No. B-6 of 13**  
**Certification Test Plan T58722.01, Rev. A**

ETI-Eloquence TTS Engine			
Texas Instruments Code Composer Studio	v2 TMS320C5000 DSP Platform	Original CD	N/A

Software Product	Software Version	Filename	Hash Value
<b>DS200 Ancillary Devices</b>			
Keil $\mu$ Vision3	3.51	Original CD	N/A
Cypress EZ-USB Dev Kit	2.31	Original CD	N/A
IAR MPS430 Embedded Workbench	3.40A	Original CD	N/A
Microsoft Windows	XP Professional with Service Pack 3	Original CD	N/A
<b>DS200 Precinct Digital Scanner</b>			
Linux From Scratch	6.2.5	lfslivecd-x86-6.2-5.iso	b3e3947bf2c3616fa45541c0643a2adfa0618207
KernelBuild			
bootplash	3.1.6-2.6.15	bootplash-3.1.6-2.6.15.diff	a16583e58e6a020817cacabf28e6239975f73c24
linux-utf8_input-1	2.6.16.27	linux-2.6.16.27-utf8_input-1.patch	1245a73e16a0d6d1b1adfa167bbee2c02ca92dd5
linux kernel	2.6.16.27	linux-2.6.16.27.tar.bz2	ef8635746668d49ba76e799ca681c1b46837e176
udev	096	udev-096.tar.bz2	8d15b89fdf93ba84e2d33ff6061e140aed0a4dce
BoothbyGraphics			
apache-ant	1.7.0	apache-ant-1.7.0-bin.zip	81aeb13c75edeee51dd5bb1c62001fac47b127a5
atk	1.11.4	atk-1.11.4.tar.bz2	808df9fb6f8c19b21c1169665dcd74629ae26c50
bdftopcf	1.0.2	bdftopcf-1.0.2.tar.bz2	245778068b5e5ccde07151635ded50da90333524
bigreqsproto	1.1.0	bigreqsproto-1.1.0.tar.bz2	32ae0505ec963cc5c0e3ee9258b126e6865d1b1b
bootplash	3.2	bootplash-3.2.tar.bz2	096721c11058f64ea6e79f11af8ea71e16ce1843
bootplash_makefile	3.2	bootplash-3.2_makefile.patch	570db9875c653eed9cafeeb05a884889e612f2bc
cairo	1.8.10	cairo-1.8.10.tar.gz	fd5e8ca82ff0e8542ea4c51612cad387f2a49df3
compositeproto	0.4.1	compositeproto-0.4.1.tar.bz2	fb1ae34418855c313a75e8e697b414a4935e13d6
damageproto	1.2.0	damageproto-1.2.0.tar.bz2	ffe177a6ae2cf023d41e015aa6ece2b191cb8a8a
dmxproto	2.3	dmxproto-2.3.tar.bz2	a3636d1b54d7bbf273f28c0d3c44101777047865
dri2proto	2.2	dri2proto-2.2.tar.bz2	21e9c0c7e0be5fe971f51589d0573b0273202b7f
encodings	1.0.3	encodings-1.0.3.tar.bz2	615b8367ee20fc50688e4876aa250419927d64cc
fixesproto	4.1.1	fixesproto-4.1.1.tar.bz2	fb47920c629e08a56442a51968a02a22733085e5
font-adobe-100dpi	1.0.1	font-adobe-100dpi-	814baccf5cf6c6545b7e8f3bbbad377be369042d



**Appendix B, Page No. B-7 of 13**  
**Certification Test Plan T58722.01, Rev. A**

		1.0.1.tar.bz2	
font-adobe-75dpi	1.0.1	font-adobe-75dpi-1.0.1.tar.bz2	3cbcd8a4a3a6bbe6cccd3d6e07a238f8c9ab7a26c
font-adobe-utopia-100dpi	1.0.2	font-adobe-utopia-100dpi-1.0.2.tar.bz2	e692c3d3933c47c69656be0fd0f06218c2db138d

Software Product	Software Version	Filename	Hash Value
<b>DS200 Precinct Digital Scanner</b>			
font-adobe-utopia-75dpi	1.0.2	font-adobe-utopia-75dpi-1.0.2.tar.bz2	2db08c2e0186831e4d68f7a2ffb2f9fe598a7280
font-adobe-utopia-type1	1.0.2	font-adobe-utopia-type1-1.0.2.tar.bz2	565cb66523f59f02da02aa9e74604634a2113643
font-alias	1.0.2	font-alias-1.0.2.tar.bz2	9a0e97d974349e3a943b0ab77015f115f15d34c3
font-arabic-misc	1.0.1	font-arabic-misc-1.0.1.tar.bz2	d11a7bdce7500c3ccc2fe59505f2bc89e4c7aa2a
font-bh-100dpi	1.0.1	font-bh-100dpi-1.0.1.tar.bz2	4f3edda5dd35145cbd1ce8759e0a999b3a04f9c0
font-bh-75dpi	1.0.1	font-bh-75dpi-1.0.1.tar.bz2	7b891d5bfd966c405c19574bca8f87b8803146d1
font-bh-lucidatypewriter-100dpi	1.0.1	font-bh-lucidatypewriter-100dpi-1.0.1.tar.bz2	a1c9d28a619358092f7196473ff3e0f0dc5304d0
font-bh-lucidatypewriter-75dpi	1.0.1	font-bh-lucidatypewriter-75dpi-1.0.1.tar.bz2	26efd25d2802c8406a96ccc3240b2c14e511d49f
font-bh-ttf	1.0.1	font-bh-ttf-1.0.1.tar.bz2	0e9ffbc738072ca832cdf5f82bff071c67b71825
font-bh-type1	1.0.1	font-bh-type1-1.0.1.tar.bz2	b960d8523b02d4401dc6e1257f68dc120761ee4b
font-bitstream-100dpi	1.0.1	font-bitstream-100dpi-1.0.1.tar.bz2	ba163df365a591de5eb9e45fa302059d572dd171
font-bitstream-75dpi	1.0.1	font-bitstream-75dpi-1.0.1.tar.bz2	43344b8ff3b2c2fda8d4cdbcc12c0688b2e04789
font-bitstream-type1	1.0.1	font-bitstream-type1-1.0.1.tar.bz2	53800b904fc3ead6b577a34fb7c1f96c1af4423f
font-cronyx-cyrillic	1.0.1	font-cronyx-cyrillic-1.0.1.tar.bz2	dfff5974629dab97677a70fa20e21c2cf48071a0
font-cursor-misc	1.0.1	font-cursor-misc-1.0.1.tar.bz2	5087a94e74f8157cb6989f71fb3b4815b236065a
font-daewoo-misc	1.0.1	font-daewoo-misc-1.0.1.tar.bz2	d169cec4e92fe1e99f3ff6766d4c6edcbb808860
font-dec-misc	1.0.1	font-dec-misc-1.0.1.tar.bz2	2489d19650f2a787b476dab2fa2412d20b95f38e
font-ibm-type1	1.0.1	font-ibm-type1-1.0.1.tar.bz2	9bcf72bcabfcbe218ad3a96ba2a45e92ef9efbc3
font-isas-misc	1.0.1	font-isas-misc-1.0.1.tar.bz2	13fe07a669dd93dfdb08717a03efe47936ab9cea
font-jis-misc	1.0.1	font-jis-misc-1.0.1.tar.bz2	adb3275d19e71e9553aa8a5fdc3b2c647277d8d4
font-micro-misc	1.0.1	font-micro-misc-1.0.1.tar.bz2	74a8be2b0b6ace97d8841356e88570f5fa3faad6
font-misc-cyrillic	1.0.1	font-misc-cyrillic-1.0.1.tar.bz2	c178f8a8b6897a8382a0f4315a5b577760ba703c
font-misc-ethiopic	1.0.1	font-misc-ethiopic-1.0.1.tar.bz2	2677191fd8b515c53bde6402513249fc0f48d53a

**Appendix B, Page No. B-8 of 13**  
**Certification Test Plan T58722.01, Rev. A**

font-misc-meltho	1.0.1	font-misc-meltho-1.0.1.tar.bz2	d20d9f8ffdeb88b62842b021d5d3d2a8cc31ea2c
font-misc-misc	1.0.1	font-misc-misc-1.1.0.tar.bz2	83c44111b5727c26e52eb915b66dc6c9eba4c458
font-mutt-misc	1.0.1	font-mutt-misc-1.0.1.tar.bz2	b677831b477027f56ad3f35c95ef3cd6711f87ac

Software Product	Software Version	Filename	Hash Value
<b>DS200 Precinct Digital Scanner</b>			
font-schumacher-misc	1.1.0	font-schumacher-misc-1.1.0.tar.bz2	ea7e009e222379fa31a16bdbd4ca5b1e9d412944
font-screen-cyrillic	1.0.2	font-screen-cyrillic-1.0.2.tar.bz2	4795ea77e14246122d21bc0fa68a3c0d5261e39d
font-sony-misc	1.0.1	font-sony-misc-1.0.1.tar.bz2	e9717546682382ebf3e6e7039766fe52bdb8846c
font-sun-misc	1.0.1	font-sun-misc-1.0.1.tar.bz2	fc91999e66fe479d07ea74e5dd2d950ff02ccb80
font-util	1.1.1	font-util-1.1.1.tar.bz2	6ee3af5466de84d61411e173e578a256aeb1074d
font-winitzki-cyrillic	1.0.1	font-winitzki-cyrillic-1.0.1.tar.bz2	d19f476710783d784dfdbcb6a1f34ef7746d3439
font-xfree86-type1	1.0.2	font-xfree86-type1-1.0.2.tar.bz2	09a4c9b8455f3f4954bfe9dd991d7fd1d0f5595a
fontconfig	2.8.0	fontconfig-2.8.0.tar.gz	570fb55eb14f2c92a7b470b941e9d35dbfafa716
fontproto	2.1.0	fontproto-2.1.0.tar.bz2	395b300fd5120a7ff90cb8fea4e2356b9632dc3e
freetype	2.3.12	freetype-2.3.12.tar.bz2	ebf0438429c0bedd310059326d91646c3c91016b
giflib	4.1.4	giflib-4.1.4.tar.bz2	2f9aed5d20d862270008bd2f8d4c91cf14c6067b
glib	2.10.3	glib-2.10.3.tar.bz2	bba1dea73c4426f6a130c82e0b7a07b78dfc73ce
glibmm	2.12.10	glibmm-2.12.10.tar.bz2	361466df6302ec5626a87e75786da4c7c39ffe14
glproto	1.4.11	glproto-1.4.11.tar.bz2	7c2a723d488dc0e09e7e0e28bde838502d774b16
gtk+	2.8.20	gtk+2.8.20.tar.bz2	8ea2449ff139b8bc457f8b5bcdcad93b02cfba9e
gtkmm	2.8.12	gtkmm-2.8.12.tar.bz2	38d11d72ac242178703b81f6d2ed6ddec78867b9
iceauth	1.0.3	iceauth-1.0.3.tar.bz2	b75b87fed108bc4fe14ef06f76025016fa54299a
inputproto	2.0	inputproto-2.0.tar.bz2	3ed9879b7dd3c14ae2283959f5962162fc01c219
intltool	0.40.6	intltool-0.40.6.tar.bz2	4f6469e09e2c06a8072dffff36f84ff401d7ea75
jdk-linux-i586	6u3	jdk-6u3-linux-i586.bin	9bc1aaaaabd35052d50c55e6462df70b4d0694ab
jpegsrc	v6b	jpegsrc.v6b.tar.gz	7079f0d6c42fad0cfba382cf6ad322add1ace8f9
jre-linux-i586	6u3	jre-6u3-linux-i586.bin	6d729efc48b2539ffcc216a7fadf8fb1d9294410
kbproto	1.0.4	kbproto-1.0.4.tar.bz2	d300745389d3a80d90c9a3c989651f228db486e5
lcms-gcc343-1	1.14	lcms-1.14-gcc343-1.patch	0520773f547c5bc923046d2f5ddff899b97f88fb
lcms	lcms	lcms-1.14.tar.gz	7f98d09bc2acc46d7641034b88449142f78bf8ff
libdmx	libdmx	libdmx-1.1.0.tar.bz2	8719434f167d476d53fca57c5be516c153354d60
libdrm	2.4.14	libdrm-2.4.14.tar.bz2	a18cc2cdfd02b8ba1c91c3e9ac609521ad3e2fe9
libfontenc	1.0.5	libfontenc-	e71370c349e93ba70f91ad1148ca9e5cabfcca4f

**Appendix B, Page No. B-9 of 13**  
**Certification Test Plan T58722.01, Rev. A**

		1.0.5.tar.bz2	
libFS	1.0.2	libFS-1.0.2.tar.bz2	41cf53fae37210acaa034199f01f36af3f3ec548
libICE	1.0.6	libICE-1.0.6.tar.bz2	ac1f702ea580bd496610266b13434858b62df9e1
libmng	1.0.9	libmng-1.0.9.tar.gz	d32e939ec95caff7839c6c9a5896e4d575c77d35
libpciaccess	0.11.0	libpciaccess-0.11.0.tar.bz2	bcebb8b8441af151b59b63e8e91e66133b64158

Software Product	Software Version	Filename	Hash Value
<b>DS200 Precinct Digital Scanner</b>			
libpng	1.2.42	libpng-1.2.42.tar.bz2	e41cea7a6f5e3065f4289de3742db87ded05b99d
libpthread-stubs	0.1	libpthread-stubs-0.1.tar.bz2	34ef40880d0112dc6d32b386d59ce94f2c139eef
libsigs	2.0.18	libsigs-2.0.18.tar.bz2	75df46c977a3418bda4d5ae7e21c9ede28993835
libSM	1.1.1	libSM-1.1.1.tar.bz2	dc535af7328dee9a6121b85c3f8041656681a195
libX11	1.3.3	libX11-1.3.3.tar.bz2	2a19724ccf78b5bb5a8eba9159d2b95e640e7b11
libXau	1.0.5	libXau-1.0.5.tar.bz2	b1c68843edf7e80ce952f7ee0541448f41bac202
libXaw	1.0.7	libXaw-1.0.7.tar.bz2	0e5effe33c4c44d960132e3dd50370134a28f8b2
libXcomposite	0.4.1	libXcomposite-0.4.1.tar.bz2	959180b067c64f3f7ac06e85400bd265e5579031
libXcursor	1.1.10	libXcursor-1.1.10.tar.bz2	096d0e538d37fd865705e5f45b0e96c7294c1f2f
libXdamage	1.1.2	libXdamage-1.1.2.tar.bz2	dc1fbc938e9bbc859c70cf2087440fc15b00bb1e
libXdmp	1.0.3	libXdmp-1.0.3.tar.bz2	7efd71d29d6cfba797b8791398e4d81ade677d77
libXext	1.1.1	libXext-1.1.1.tar.bz2	c2eb8d8d760c6881e51c938812764d1d6cef51c
libXfixes	4.0.4	libXfixes-4.0.4.tar.bz2	3f2d1c473855ba0cf13137a80d585df7fe37111c
libXfont	1.4.1	libXfont-1.4.1.tar.bz2	f8dc669760975b41885143f828b54164224c8a31
libXft	2.1.14	libXft-2.1.14.tar.bz2	e08ae6b1f56e160179b9f141b4ab799333ec725e
libXi	1.3	libXi-1.3.tar.bz2	7685f2881ce40b13028d9409eeddb9cf1ed0d8ef
libXinerama	1.1	libXinerama-1.1.tar.bz2	5f445194ef3318f66c287c0c69f778988a3f9266
libxkbfile	1.0.6	libxkbfile-1.0.6.tar.bz2	6364e0679eb893d6fbb6adcf0e8230cfdefe0b68
libXmu	1.0.5	libXmu-1.0.5.tar.bz2	e7ff5960f2374852b941f909cdebdeafe7d29322f
libXpm	3.5.8	libXpm-3.5.8.tar.bz2	3bfc833ed4527f74b1c66c386da62271d0313413
libXrandr	1.3.0	libXrandr-1.3.0.tar.bz2	33dd2f67060465f872db9ea03f597e28517f0c8e
libXrender	0.9.5	libXrender-0.9.5.tar.bz2	278f762feb8e754aa5214175abf580ff486281f7
libXres	1.0.4	libXres-1.0.4.tar.bz2	d5ee9560a61666e6bb3d2285b9634fccd7211d65
libXScrnSaver	1.2.0	libXScrnSaver-1.2.0.tar.bz2	ea2935eb67efa77fd90372337f2d782a8ef74cea
libXt	1.0.7	libXt-1.0.7.tar.bz2	3c285b9c04a393dec1cc3d60cf5582d798eb3272
libXtst	1.1.0	libXtst-1.1.0.tar.bz2	4363e9285bfb5a884073efacc50d39edb803a1a5
libXv	1.0.5	libXv-1.0.5.tar.bz2	3936dd661e75d173b9fd1da9d97e5720e9657254
libXvMC	1.0.5	libXvMC-1.0.5.tar.bz2	153b85884f22b882cecb9fc462fe24c669a80dbd
libXxf86dga	1.1.1	libXxf86dga-1.1.1.tar.bz2	a93004cfbe4fd6bc37c6645705d5a6d90c0940b7
libXxf86vm	1.1.0	libXxf86vm-	f5ce7854f201d9c69dfcdd13123b51f497b69a47

**Appendix B, Page No. B-10 of 13**  
**Certification Test Plan T58722.01, Rev. A**

		1.1.0.tar.bz2	
makedepend	1.0.2	makedepend-1.0.2.tar.bz2	57e092856580d9984e47c4b1433b69391de07df3
mkfontdir	1.0.5	mkfontdir-1.0.5.tar.bz2	971728b0f453ea5df028aa5d54fe3fbd8e99a7d
mkfontscale	1.0.7	mkfontscale-1.0.7.tar.bz2	0a0c25da68c87380e2c013c808a6e0cc0983fae9

Software Product	Software Version	Filename	Hash Value
<b>DS200 Precinct Digital Scanner</b>			
pango	1.12.3	pango-1.12.3.tar.bz2	ad493c4560c0ffd9dcd8a1724d5bff058ef112c
pixman	0.15.20	pixman-0.15.20.tar.gz	a5f973b6895e269731964fbc328f61a8cbfde931
randrproto	1.3.1	randrproto-1.3.1.tar.bz2	36731bae6e815453af4b055c26ad8e9e2653ca05
recordproto	1.14	recordproto-1.14.tar.bz2	212928572898ed150366c6026e2694b193ff9f79
renderproto	0.11	renderproto-0.11.tar.bz2	d30cf508b1a1b5f0deb1c6db41ba2f4e57680637
resourceproto	1.1.0	resourceproto-1.1.0.tar.bz2	36b86840005c15e393c86d7075688d430ab2a11d
scrnsaverproto	1.2.0	scrnsaverproto-1.2.0.tar.bz2	c734cfe9a1ce57fd42957389dcc90518fd7ca6b6
sessreg	1.0.5	sessreg-1.0.5.tar.bz2	d1dac6a398b23ed44bb67286ec083e9071bd00e7
setxkbmap	1.1.0	setxkbmap-1.1.0.tar.bz2	f02f93a08ac060d760566693c748e0fba3db8a06
smproxy	1.0.3	smproxy-1.0.3.tar.bz2	1ba44a4a58b05d6a6f7c4b1f67b793dce2ccf2ba
tiff	3.8.2	tiff-3.8.2.tar.gz	549e67b6a15b42bfcd72fe17cda7c9a198a393eb
twm	1.0.4	twm-1.0.4.tar.bz2	7456e90f19e4747e1785f596b93f692d68a9f079
util-macros	1.5.0	util-macros-1.5.0.tar.bz2	ac61387be2a0b97f839041832bd8d06e03cfc942
videoproto	2.3.0	videoproto-2.3.0.tar.bz2	4aef2b438d45b3ab75e640996ce1267d3468f48c
x11perf	1.5.1	x11perf-1.5.1.tar.bz2	d1f85da3df5b216b64c1735d109380214787222d
xauth	1.0.4	xauth-1.0.4.tar.bz2	90d32f28bb61ca6d831dcc35429a5ad53be73283
xbacklight	1.1.1	xbacklight-1.1.1.tar.bz2	3541ab5e0956b4f0c97b1200dc32a35d2ccb0f0f
xbitmaps	1.1.0	xbitmaps-1.1.0.tar.bz2	845b825f7e6d193d47db8b67ae8332d87ef8c2b3
xclock	1.0.4	xclock-1.0.4.tar.bz2	1987cafb3163c6b68bc7ecfbc143c8cd373d64bb
xcmiscproto	1.2.0	xcmiscproto-1.2.0.tar.bz2	1a55e042b33c0e0aaf2299942315a5208d644707
xcmsdb	1.0.2	xcmsdb-1.0.2.tar.bz2	8341f7219a5720da758b0571eb1f4d9072265485
xcursor-themes	1.0.2	xcursor-themes-1.0.2.tar.bz2	12b865c17c65e70a6bc20300dfa660fe8faaa0a4
xcursorgen	1.0.3	xcursorgen-1.0.3.tar.bz2	7df26b371476654dc191c45e7d20ae3a5e0cad87
xdpyinfo	1.1.0	xdpyinfo-1.1.0.tar.bz2	01971f007048a46a4a31a69c661bc3a378de60f0
xdriinfo	1.0.3	xdriinfo-1.0.3.tar.bz2	d211d6f12f4c801d2f4cf184c6daae37aa5858ff
xev	1.0.4	xev-1.0.4.tar.bz2	4f62e131ba96842eef1660e8869533cd3923ac35
xextproto	7.1.1	xextproto-7.1.1.tar.bz2	1bb4bd12d65a17b3168dc9b4e028b33a2f7b2cad

**Appendix B, Page No. B-11 of 13**  
**Certification Test Plan T58722.01, Rev. A**

xf86-input-keyboard	1.4.0	xf86-input-keyboard-1.4.0.tar.bz2	5061fdaff8b7ddcbcca82f065c4abbfff255a1da
xf86-input-mouse	1.5.0	xf86-input-mouse-1.5.0.tar.bz2	b9213bf745b793a3da2c946ea4d8ee5768e560f4
xf86-video-vesa	2.3.0	xf86-video-vesa-2.3.0.tar.bz2	4689b7c295d7a8d7326302dafecb812739617134

Software Product	Software Version	Filename	Hash Value
<b>DS200 Precinct Digital Scanner</b>			
xf86bigfontproto	1.2.0	xf86bigfontproto-1.2.0.tar.bz2	312a2ea708b257520c1af4393b69d73a393a478f
xf86dgaproto	2.1	xf86dgaproto-2.1.1.tar.bz2	97a06120e7195c968875e8ba42e82c90ab54948b
xf86driproto	2.1.0	xf86driproto-2.1.0.tar.bz2	0dfc6616ffc68ca3c3b5decbe1e365aaa93be8548
xf86vidmodeproto	2.3	xf86vidmodeproto-2.3.tar.bz2	22d034c2f66985f8541b9ea3421096ceaa006355
xgamma	1.0.3	xgamma-1.0.3.tar.bz2	f9c7d93f4b271bab41ee3c91b371d52572e4e08c
xhost	1.0.3	xhost-1.0.3.tar.bz2	ebcdccdc908e642e527eebbde6ba8084d90c04f6
xineramaproto	1.2	xineramaproto-1.2.tar.bz2	3c397c9ea38aaae785dd7901f250891dfa7f3249
xinit	1.2.0	xinit-1.2.0.tar.bz2	85a838c2010f27ef6d09d6ec4b1208a66cc8d697
xinput	1.5.0	xinput-1.5.0.tar.bz2	02d1ccc83007aa7848b1b024ac64c310303f973e
xkbcomp	1.1.1	xkbcomp-1.1.1.tar.bz2	aeb733c495d7afd42136bf8ae5c6e792c63f0b4b
xkbevd	1.1.0	xkbevd-1.1.0.tar.bz2	b510b4a1b7486beacb5570c204f7fdd4b61f0ab4
xkbutils	1.0.2	xkbutils-1.0.2.tar.bz2	2c025038ca12ee2494b2401ea2c12c74fe88bf91
xkeyboard-config	1.7	xkeyboard-config-1.7.tar.bz2	d6df43bfc0596be04865f2be7c4e794e198358c8
xkill	1.0.2	xkill-1.0.2.tar.bz2	90f08652859daf71b682c3b9163ebf72ce88c4bc
xlsatoms	1.0.2	xlsatoms-1.0.2.tar.bz2	3855734b5ec0d43b5886ac0ffa58d7cf96f46926
xlsclients	1.0.2	xlsclients-1.0.2.tar.bz2	5cde39a28c5352d1d555714836f57c05197e419d
XML-Parser	2.36	XML-Parser-2.36.tar.gz	74acac4f939ebf788d8ef5163cbc9802b1b04bfa
xmodmap	1.0.4	xmodmap-1.0.4.tar.bz2	9b49388bb527a8f7b7e86c4aa4c75a83372f6baa
xorg-server	1.7.1	xorg-server-1.7.1.tar.bz2	d31e259b3ab975e2c1baea8f7310b57152ae3c62
xpr	1.0.3	xpr-1.0.3.tar.bz2	9dbd0ff136b612285e00d92d0c7675a4207b1c4a
xprop	1.1.0	xprop-1.1.0.tar.bz2	16b377c76a4a010200063a056e7a5e244ab6ff00
xproto	7.0.16	xproto-7.0.16.tar.bz2	0eda5588d42f2c810d8491da44fe84a4093e12bc
xrandr	1.3.2	xrandr-1.3.2.tar.bz2	0e49b0a0889ae8a590452c6cd0d60a2253a8d940
xrdb	1.0.6	xrdb-1.0.6.tar.bz2	e4faff5e02b3027298dc589e318a6dc7eb30a6d5
xrefresh	1.0.3	xrefresh-1.0.3.tar.bz2	3f34ceca9509f47e60ddfe14a98225eaffeba705
xset	1.1.0	xset-1.1.0.tar.bz2	ff4295442821826092b17248c1ad65e16cd860ef
xsetroot	1.0.3	xsetroot-1.0.3.tar.bz2	56ed1df9834627a107550475629df51275cd0c44
xterm	254	xterm-254.tgz	934811737745b76ca75bf940feb975943bf1084d
xtrans	1.2.5	xtrans-1.2.5.tar.bz2	e8c4ce58b42d05e613fe535319a7d7f45f30f3e9

**Appendix B, Page No. B-12 of 13**  
**Certification Test Plan T58722.01, Rev. A**

xvinfo	1.1.0	xvinfo-1.1.0.tar.bz2	8695bfb597dbf3ed8e3277fddda4722da21baaa3
xwd	1.0.3	xwd-1.0.3.tar.bz2	f6708d14040630d1d3255987c28efcbf7aee05aa
xwininfo	1.0.5	xwininfo-1.0.5.tar.bz2	9730db0d1bd75b8bc5bc399f56cab9f5aee3bcfc
xwud	1.0.2	xwud-1.0.2.tar.bz2	15a6c5e3ffc03b7e8e597947061940fee6c0a9fc
<b>BoothbyEnhanced</b>			
aumix	2.8	aumix-2.8.tar.bz2	5cea563ae91f628433a1950a36efd23681da4bf4

Software Product	Software Version	Filename	Hash Value
<b>DS200 Precinct Digital Scanner</b>			
beecrypt	4.1.2	beecrypt-4.1.2.tar.gz	71cebd3329bb2561ffba24a2004dfac50b143f59
blfs-bootscripts	20060910	blfs-bootscripts-20060910.tar.bz2	58ff10492f9abceed6ca4a105c479d5f2e3e8002
BLFS-ca-bundle	3.12.5	BLFS-ca-bundle-3.12.5.tar.bz2	8cf4be3072184940f8cfc3888ef0ba1cb58a5377
boost	1.34.1	boost_1_34_1.tar.bz2	b771271d5cbd3bdb0f119dd66dfd36bad7a66866
busybox	1.2.1	busybox-1.2.1.tar.bz2	487ef51209e253d3aa981dc0b0645063a804f4c7
cryptocme	2.0	cryptocme-2.0-rhel30.tar.gz	e06505ee2312f4b5d8f90f6cd5260022bd862b82
ctags	5.6	ctags-5.6.tar.gz	930afaa138624717393fe475201f795251bd5e5e
cvs-zlib-1	1.11.22	cvs-1.11.22-zlib-1.patch	0d20bab8a6b6e419a8c900d082b487ad6a3aec38
cvs	1.11.22	cvs-1.11.22.tar.bz2	5dfa11da84a890d7d61516fd450c001dc24bcc0d
dosfstools	2.11	dosfstools-2.11.src.tar.gz	b0d8714475ca7c7a96a46adf7c4839d69ce2f412
e2fsprogs	1.38	e2fsprogs-1.38.tar.bz2	6252152e90c52a8cf158559cd16c0d0ec236c980
expat	2.0.1	expat-2.0.1.tar.gz	663548c37b996082db1f2f2c32af060d7aa15c2d
gpm-segfault-1	1.20.1	gpm-1.20.1-segfault-1.patch	da53bf78a0ebaa5020e332aa6d6861159170ed86
gpm-silent-1	1.20.1	gpm-1.20.1-silent-1.patch	8899a212eadfbda201d8da3e44590bd05b97f9f6
gpm	1.20.1	gpm-1.20.1.tar.bz2	c48d937e62abb438c2f6439b34ef3332c89af8d1
libusb	0.1.12	libusb-0.1.12.tar.gz	599a5168590f66bc6f1f9a299579fd8500614807
linux-libc-headers	2.6.12.0	linux-libc-headers-2.6.12.0.tar.bz2	e72c9b260995b269c9fb9248ed468c18fb01f3fd
openssh	4.5p1	openssh-4.5p1.tar.gz	2eefcbb9e4fa16fa4500dec107d1a09d3d02d7
openssl-fix_manpages-1	0.9.8n	openssl-0.9.8n-fix_manpages-1.patch	afb498051e466131ae90dfc678234e8876af88a4
openssl	0.9.8n	openssl-0.9.8n.tar.gz	595f5ebf592568515964f0adc62239e7012ef08b
pkg-config	0.22	pkg-config-0.22.tar.gz	3ec40bda9864d7aa3c912c6ae87a750fd8b6e420
unzip552	5.52	unzip552.tar.gz	1831bd59b9e607a69052f83b263384895e2d4a19
usbutils	0.72	usbutils-0.72.tar.gz	891b8825d964880146d5c980e52bb9e23d92fe2b
zip232	2.32	zip232.tar.gz	5bc562bf95d9aee0cb6625e6038898e1f191a4aa
<b>Model 100 Precinct Scanner</b>			
QNX Operating System	4.22A	Original 3-1/2" High-Density Floppy Diskettes (Four Diskettes)	N/A
QNX Operating System	4.22A Manual Patches	gmake	1683c7d6fee0aaf82cf8fa16a3d53e69a861ff39

**Appendix B, Page No. B-13 of 13**  
**Certification Test Plan T58722.01, Rev. A**

QNX/Sybase WATCOM C	10.6	Original CD	N/A
QNX Product Suite	May 2001 Upgrade	Original CD	Original CD
QNX Embedded Kit	1.0	Original 3-1/2” High-Density Floppy Diskette	N/A

Software Product	Software Version	Filename	Hash Value
<b>Model 100 Precinct Scanner</b>			
QNX Embedded Kit	1.0 Manual Patches	Efsys.386ex	b0e0e35d9feb036d9b0b6f8260f18d9eb3b4c877
QNX Embedded Kit	1.0 Manual Patches	Efsys.cirrus	5aa5510925cdb0cd2d6fcefb3ae4d4f8d03b4dea
QNX Embedded Kit	1.0 Manual Patches	boot.386exp	708590c7feec1ba8db6dd4a503dc49a88d0818cb
QNX Embedded Kit	1.0 Manual Patches	commons.lib	6bb7f353ce429c9e35551a7f0d806c48adac19bd
QNX Embedded Kit	1.0 Manual Patches	compress.o	c317315d9f58a9d3c25349e2b18110712395e3ff
QNX Embedded Kit	1.0 Manual Patches	cstart_copy.o	761182fffb4ab2f2932a2b9be21dee4ea4ee2488
QNX Embedded Kit	1.0 Manual Patches	cstart_ram.o	9fbf727c32521c631196f220a592bb5c8a404bd7
QNX Embedded Kit	1.0 Manual Patches	nocis.o	bd56005d8d7c510dfc8296ffc3c89ea98f232f07
QNX Embedded Kit	1.0 Manual Patches	sss.lib	c4fd16198dffca3a33b14022cf100a68cbde93a6
QNX Embedded Kit	1.0 Manual Patches	xip.o	bc729655ef6851fd1f711844dd198b02b6638fde
<b>Model 650 Central Scanner</b>			
QNX Product Suite	May 2001 Upgrade	Original CD	N/A
QNX Operating System	4.25 Patch G	qnx-4.25-01G.tarx	a7b88ce9674e6bdf48f8edd1600f2b15b31d5e1d
QNX TCP/IP Runtime	4.25 Patch D	tcprrt-4.25-01D.tarx	77fe7148af16a7a5685e19bc91f732d5b12907e6
QNX TCP/IP Runtime Documentation	4.2.5 Patch D	tcprrt-4.25-02D.tarx	99ef2f21e37beaea69a1f9d509c981fbc80ad570
QNX TCP/IP Development Kit	4.25 Patch C	tcprrt-4.25-01C.tarx	2f04519b314d991361b9be78c30f61c1d75e9be5
QNX TCP/IP Development Kit Documentation	4.25 Patch C	tcprrt-4.25-02C.tarx	e7daea43f69384900931203c47c4748555f5a8ec